


HSHB1221



Key Features

- Minimum bend diameter - 120mm
- Ambient working temperature: MAX (+)95°C
- Bending Direction - horizontal
- Cut Length (Monochrome & Tunable White) - 83.3mm
- Cut Length (RGB / RGBW) - 100mm
- DMX/SPI Pixel Light options available on request


Connectors



Mounting Accessories



Accessory Dimensions

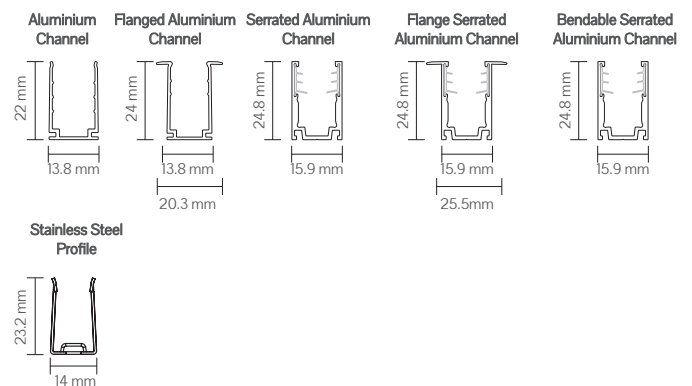

Code

Example: HSHB1221 - 068022DEDO-2400

Code	Wattage (W/m)	CRI	CCT	lm/m	Connector	Driver	Length
HSHB1221	06 6W/m	80 CRI>80	22 2200K	200	DE Direct Entry	DO Non-Dim	-XXXX
			27 2700K	210	SL Left side entry	DA DALI	
	30 3000K		210	SR Right side entry	CA Casambi		
	35 3500K		210	BE Bottom Entry	SW Switch Dim		
	40 4000K		210		PH Phase Dim		
	57 5700K		210		RC 2.4Ghz Remote Control		
	65 6500K		210				
	TW 2200K - 5700K		210				
	04 3.6W/m		RGB RGB				
	05 5W/m		R2 RGBW (2700K)				
	R3 RGBW (3000K)						
	R4 RGBW (4000K)						

Lumen/m figures based on, 6W, CRI>80.

FOS Lighting reserve the right to change any data without notification.