

CEILING MOUNTED DEEP TRIM DOWNLIGHT (100 SERIES)



IP65


5
YR
WARRANTY



Key Features

- 5 Year Warranty
- CRI>80 (Standard), CRI>90 (Optional)
- 220-240V
- Working Temperature: -20°c to +50°c
- 2mm thick toughened glass diffuser
- Aluminium housing with corrosion resistant powdercoating
- L80 >50000 hours

Dimensions

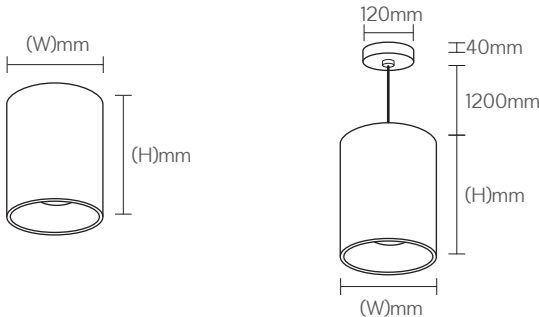

Technical Information

	Dimensions	Illumination	Lumens @ 60° Beam Angle
	Width (W) x Height (H)	Wattage	Lumens/m
CMD100120	100mm x 120mm	1x5	577
		1x10	1152
		1x15	1625
CMD100150	100mm x 150mm	1x5	577
		1x10	1152
		1x15	1625
CMD100200	100mm x 200mm	1x5	577
		1x10	1152
		1x15	1625

Code

Example: CMD100120-S-20-1x5W-3K-80-B-C-ND-12

Fitting	Mounting		Ingress Protection		Illumination (Wattage)		LED Colour		CRI		Finish (Body + Trim)		Lens Options		Control Gear		Beam Angle	
CMD100120 CMD100150 CMD100200	S	Surface Mounted	20	IP20	1x5W	1x5	3K	3000K	80	CRI>80	B	Black	C	Clear	ND	Non-Dim	12°	12°
	P	Pendant	65	IP65	1x10W	1x10	4K	4000K	90	CRI>90	BW	Black + White	CH	Clear + Honeycomb	DA	DALI	24°	24°
					1x15W	1x15	6K	6000K			BG	Black + Gold	F	Frosted			36°	36°
											W	White	FH	Frosted + Honeycomb			60°	60°
											WB	White + Black						
											WG	White + Gold						

HAWKO Lighting reserve the right to change any data without notification