


# HYPER 1.1



## Features

- 5 Year Warranty
- CRI>97 (Standard), CRI>80 on request (3000K ONLY)
- IP20 (Standard), IP44 on request
- Honeycomb or frosted filter options

## Dimensions

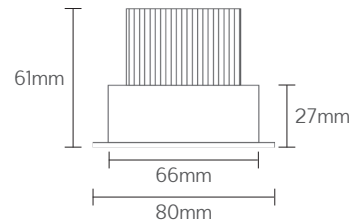

## Technical Information

	Beam Angle	2700K CRI>97	3000K CRI>97	4000K CRI>97
9W	25°	650	654	738
	40°	659	650	728
	60°	634	626	703
11W	25°	850	895	990
	40°	871	891	987
	60°	839	904	971
15W	25°	1157	1209	1327
	40°	1145	1186	1322
	60°	1120	1206	1315
21W	25°	1569	1639	1820
	40°	1603	1686	1922
	60°	1488	1649	1776

## Code

Example: **HYPER1.1-9W-B-27K-18-80-20-STD-HC**

Fitting	Wattage		Frame Colour		LED Colour		Beam Angle		CRI		IP		Dimming		Filters	
	9W	11W	B	Black	27K	2700K	18	18°	80	CRI>80	20	IP20 (Standard)	STD	Trailing & Leading	HC	Honeycomb
Hyper 1.1	9W	11W	W	White	3K	3000K	25	25°	97	CRI>97 (Standard)	44	IP44	DALI	Edge Dim (Standard)	FR	Frosted
	15W	15W			4K	4000K	40	40°						DALI Dim		
	21W	21W					60	60°								