


PHHB2222



Key Features

- Minimum bend diameter - 400mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Horizontal
- Incremental Order Length (Monochrome, 12W, 16.5W) - 50mm
- Incremental Order Length (Monochrome, 18W) - 55.6mm
- Incremental Order Length (Tunable white, 12W) - 83.3mm
- Incremental Order Length (RGB, 12W / RGBW, 15W) - 83.3mm
- DMX/SPI Pixel Light options available on request


Connectors



Mounting Accessories



Accessory Dimensions

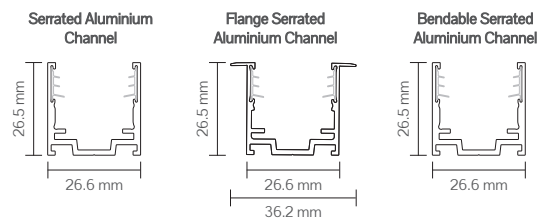

Code

Example:

PHHB2222 - 178022DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			lm/m		Connector		Driver		Length
PHHB2222	12	12	80	CRI>80	22	2200K	950	DE	Direct Entry	DO	Non-Dim			
	15	15			27	2700K	950	SL	Left side entry	DA	DALI			
	17	16.5			30	3000K	1000	SR	Right side entry	CA	Casambi			
	18	18			35	3500K	1000	BE	Bottom Entry	SW	Switch Dim			
					40	4000K	1000			PH	Phase Dim			
					57	5700K	1000			RC	2.4Ghz Remote Control			
					TW	2200K-5700K								
					DW	1800K-3000K								
					RGB	RGB								
					R2	RGBW (2700K)								
					R3	RGBW (3000K)								
					R4	RGBW (4000K)								

Lumen/m figures based on, 16.5W, CRI>80. ## HAWKO Lighting reserve the right to change any data without notification.

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product

HAWKO Lighting - Neon Flex Range - 2026