




# PHVB2219




## Key Features

- Minimum bend diameter - 400mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Vertical
- Incremental Order Length (Monochrome) - 50mm
- Incremental Order Length (Tunable white) - 83.3mm
- Incremental Order Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


## Connectors

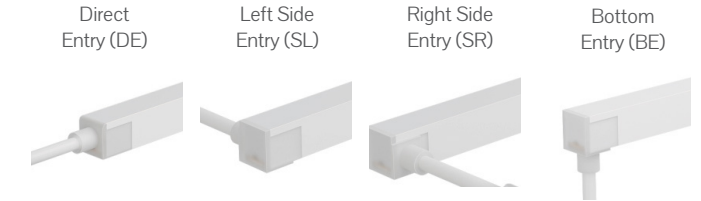

## Mounting Accessories



## Accessory Dimensions

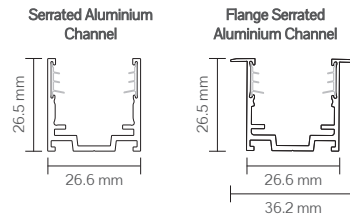

## Code

Example:

PHVB2219 - 78022DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			Connector		Driver		Length
						lm/m						
PHVB2219	12	12	80	CRI>80	22	2200K	1200	DE	Direct Entry	DO	Non-Dim	-xxxx
	15	15			27	2700K	1300	SL	Left side entry	DA	DALI	
	17	16.5	30	3000K	1300	SR	Right side entry	CA	Casambi			
			35	3500K	1400	BE	Bottom Entry	SW	Switch Dim			
	40	4000K	1400	PH	Phase Dim							
	57	5700K	1300	RC	2.4Ghz Remote Control							
	TW	2200K-5700K										
	DW	1800K-3000K										
	RGB	RGB										
	R2	RGBW (2700K)										
	R3	RGBW (3000K)										
	R4	RGBW (4000K)										

# Lumen/m figures based on, 12W, CRI>80. ## HAWKO Lighting reserve the right to change any data without notification. #### If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product