


22 RECESSED - H2215R



Features

- Max Module Distance: 2.5m
- Controls: Non-Dimmable, DALI Dimmable, Switch-Dim, Casambi, Tunable White
- Power Supply: Remote Driver
- Finish Colour: Natural Anodised, Black, White
- Installation Type: Recessed with 2 recessed brackets per metre
- Input Voltage: 24V


Technical Information

	4W/m (04)	8W/m (08)	12W/m (12)	16W/m (16)	
Monochrome	CCT				
	2700K / 3000K / 3500K / 4000K				
	Ingress Protection (IP)				
	IP20, IP67				
CRI>					
90					
Lumens/m (4000K)		520	1000	1560	1800
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT				
	RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP)				
IP20, IP67					
CRI>					
-					
Lumens/m		410 (RGB)			
RGBW	19.2W/m (19)*		19.2W/m (20)		
	CCT				
	RGBW (3000K/4000K/6000K)		RGBW (3000K/4000K)		
	Ingress Protection (IP)				
IP20, IP67					
CRI>					
-					
Lumens/m		920	920		
Tunable White	19.2W/m (19)		23W/m (23)		
	CCT				
	2500K-6000K				
	Ingress Protection (IP)				
IP20, IP67					
CRI>					
90					
Lumens/m		1680	1700		

HAWKO Lighting reserve the right to change any data without notification *LED option has an on-board constant onrroller IC with inbuilt temperature control


Accessories

Mounting Bracket

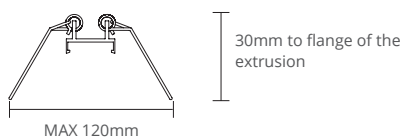

Photometrics

H2215R-R-05-90-40-OD-D0-79-1000



Code

Example: H2215R-R-04-90-40-OD-D0-79-5000

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H2215R H2215RIP	R Recessed	04 4W/m 08 8W/m 12 12W/m 16 16W/m 14 14.4W/m 19 19.2W/m 20 19.2W/m 23 23W/m	90 CRb-90	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 65 6500K TW 2700K-6000K RGB RGB RGBW3K RGBW 3000K RGBW4K RGBW 4000K RGBW6K RGBW 6500K	OD Opal	DO Non-Dim DA DALI D4 DALI RGBW SW Switch-Dim CA Casambi C4 Casambi ((TW, RGB, RGBW) T2 Tunable White	79 Natural Anodised 10 Black 11 White CU Custom	- XXXX

HAWKO Lighting reserve the right to change any data without notification