


## Key Features


Optical Systems	Opal Diffused	CCT	2700K   3000K   4000K
Mounting Type	Wire Pendant   Rod Pendant	Controls	Non Dimming   DALI Dimming   Switch Dimming   Casambi
Finish Options	Sandy Black   Sandy White   Custom colours available by request	Power Supply	Integral Driver
System Warranty	5 Years	Wattage	14.4W/m   28.8W/m   43.2W/m
CRI	CRI >80   CRI >90	Minimum Bend radius	400mm

## Standard Configuration


### Curved corners

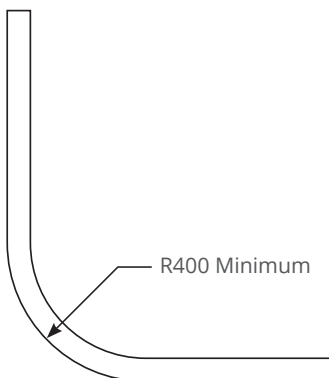

### Circles

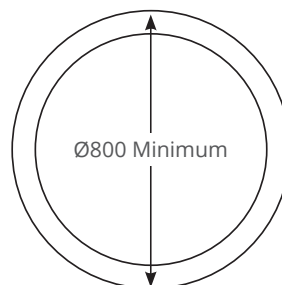

### Pill

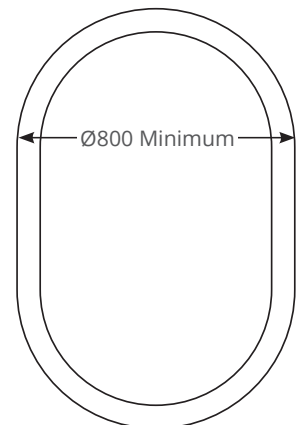

- Custom curves available


## Technical Information

	Monochrome		
	14.4W/m	28.8W/m (2 x 14.4W/m)	43.2W/m (3 x 14.4W/m)
4000K	1204lm/m	1806lm/m	2709lm/m
Light Direction	Indirect	Direct	Direct

# Lumens values based on Opal, 4000K, CRI>90

## Accessories

### Wire Suspension

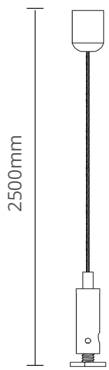

## Code

Example: V6595C-P-15-90-30-OD-D0-10-2800

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length							
V6595C	P	Wire Pendant (Direct)	15	14.4 W/m	80	CRI>80	27	27000K	OD	Opal	D0	Non-Dim	10	Black	-XXXX
	D	Rod Pendant (Direct)	28	2x14.4 W/m	90	CRI>90	30	3000K							
	U	Wire Pendant (Direct/Indirect)	43	3x14.4 W/m			40	4000K							
	Y	Rod Pendant (Direct/Indirect)													
						DA	DALI	11	White						
						SW	Switch-Dim	CU	Custom						
						CA	Casambi								

FOS Lighting reserve the right to change any data without notification