


55 JOIST - H55100

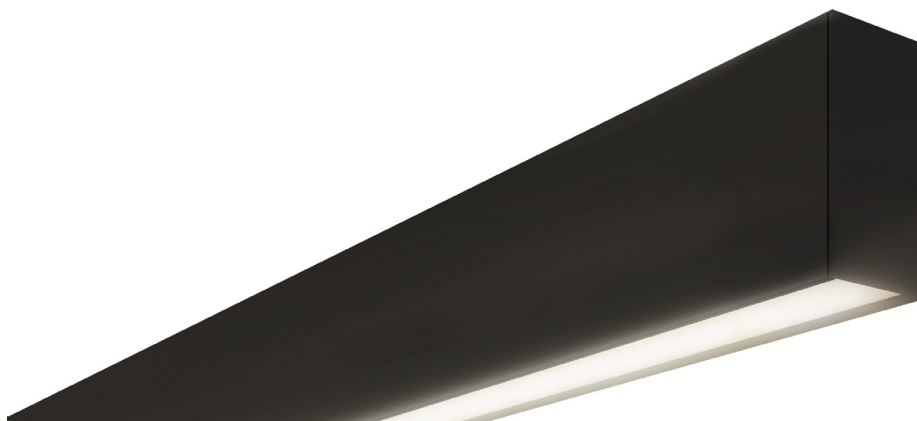


Key Features


- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- 3.8kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime
- Direct & Indirect illumination

Dimensions

Profile




Colour Options



Mounting

Wire Pendant (P) Up/Down Wire (U) Wall Up & Down Mounted (C) Wall Mounted (W)
Rod Pendant (D) Up/Down Rod (Y) Wall Mounted Adjustable (A)

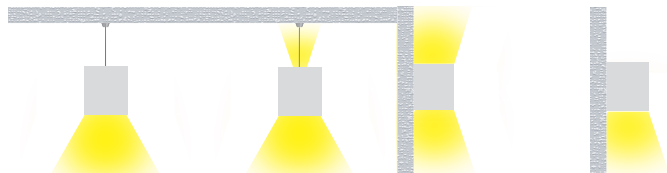

Code

Example:

H55100 - P1680300DDO11 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H55100	P Wire Pendant D Rod Pendant U Up/Down Wire Y Up/Down Rod W Fixed Wall A Adjustable wall C Wall Up/Down	16 16W/m 2688 lm/m 19 19 W/m 3306 lm/m 26 26 W/m 4316 lm/m 35 35 W/m 5530 lm/m 40 40W/m	80 CRI>80 90 CRI>90	30 3000K 40 4000K 50 5000K TW 2700K - 6500K	OD Opal MF Micro Prismatic Frosted ¹	DO Non-Dim DA DALI PD Push-Dim CA Casambi TW Tunable White	10 Black 11 White 75 Gray CU Custom	- XXXX

HAWKO Lighting reserve the right to change any data without notification

**Lumens are delivered lumens for both direct & indirect at the same time

**CRI 80 as standard

¹Direct Only