

# H5580




## Key Features


- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- 2.9kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

## Dimensions

Profile




## Colour Options

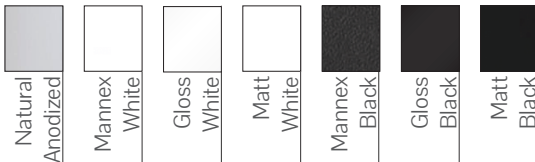

## Mounting

Surface Mounted (S) Wire Pendant (P) Recessed Trimless (T) Wall Mounted (W)  
Rod Pendant (D) Wall Mounted Adjustable (A)

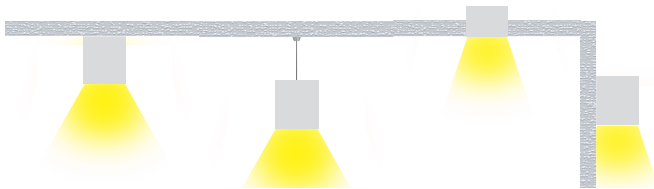

## Code

Example: H5580 - S168030ODDO11 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H5580	S Surface Mounted	16 16W/m	80 CRI>80	30 3000K	OD Opal	DO Non-Dim	79 Anodised	- XXXX
	P Wire Pendant	19 19 W/m	90 CRI>90	40 4000K		DA DALI	11 Mannex	
	D Rod Pendant	26 26 W/m		50 5000K	PD Push-Dim	White		
	T Trimless Recessed	35 35 W/m		TW 2700K - 6500K	CA Casambi	12 Gloss White		
	W Fixed Wall				TW Tunable White	13 Matt White		
	A Adjustable wall					10 Mannex Black		
						9 Gloss Black		
						8 Matt Black		
					CU Custom			

# FOS Lighting reserve the right to change any data without notification

\*\*Lumens based on 4000K

\*\*\*CRI 80 as standard