


Key Features

- 24V Input
- IP20 or IP67 options available
- A variety of Colour temperatures (2700K, 3000K, 4000K)
- HYPERFLEX must be installed with a heatsink
- L90 > B10 > 54000hrs
- Operating temperature: -20° to +60°

Dimensions

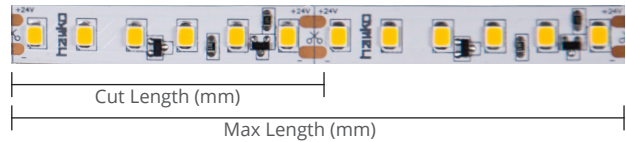

	HYPERFLEX	
W/m	11.5	25
Cut Length (mm)	55.6	55.6
Max Length (m)	5	5

Image used is only for reference

Technical Information

HYPERFLEX								
24V								
CRI>80								
HYPERFLEX must be installed with a heatsink								
Non-Dim, DALI-Dim, Casambi, Phase Dim								
IP20					IP67			
11.5W/m			25W/m			11.5W/m		
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
2100lm/m	2170lm/m	2300lm/m	4500lm/m	4600lm/m	5000lm/m	2100lm/m	2170lm/m	2300lm/m
64 LED's per metre			144 LED's per metre			64 LED's per metre		

Code

Example:


HYPERFLEX - 122030-2447

Code	Power		IP		CCT		Length
HyperFlex	12	11.5W/m	20	IP20	27	2700K	- XXXX
	25	25W/m	67	IP67	30	3000K	
					40	4000K	


HAWKO Lighting reserve the right to change any data without notification

LED FLEX & PROFILE CONFIGURATION


16 Corner
H1616CR




18 Slim
H1807




18 Square
H1815




18 Multi
H1819




22 Square
H2215




36 Slim
H3518




36 Proud
H3640



36D
H3640D




60 Round
H60T



18 Slim
Recessed
H1707R



22 Recessed
H2215R



ECOFLEX G2 IP20 8mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
ECOFLEX G2 IP67 12mm x 6mm					X	X	X	X	X		X
HYPERFLEX IP20 15mm x 3mm					X	X	X	X	X		X
HYPERFLEX IP67 18mm x 6mm						X	X	X	X		
XFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
XFLEX IP67 13mm x 6mm					X	X	X	X	X		X
WHITEFLEX IP20 10mm x 2mm	X	X	X	X	X	X	X	X	X	X	X
WHITEFLEX IP67 12mm x 2mm					X	X	X	X	X		X
CHROMAFLEX IP20 12mm x 3mm					X	X	X	X	X		X
CHROMAFLEX IP67 14mm x 6mm					X	X	X	X	X		X
COLOURFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
COLOURFLEX IP67 14mm x 6mm					X	X	X	X	X		X