

60 JOIST - H60100




IP40

240V



*Cyanosis compliant on request

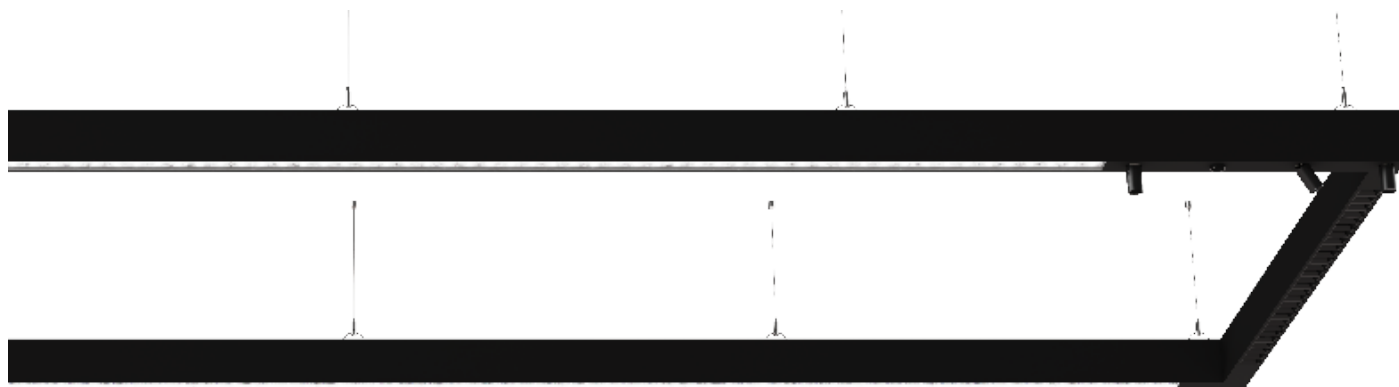


Key Features


- Complies with relevant Australian Standards
- Screwless end caps (On Request)
- Emergency Options available (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Plug and play
- Australian manufactured
- IP55 (Only On Diffused Optics On Request)

Dimensions

Profile



Colour Options



Mounting

Surface Mounted (S) Wire Pendant (P) Up/Down Wire (U) Recessed Trimless Wall Up & Down Mounted (C) Wall Mounted (W)



Code

Example: H60100- S129030ODDO10 - 2400

Code	Mounting		Power			CRI		CCT		Optics		Driver		Finish		Length
H60100	S	Surface Mounted	12	12 W/m	1150 lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
Optional	T	Trimless Recessed	16	16 W/m	1533 lm/m	90	CRI>90	35	3500K	Lx	Linear Lens**	DA	DALI	11	White	
	W	Wal Mounted	19	19 W/m	1845 lm/m			40	4000K	Bx	Black	SW	Switch-Dim	75	Gray	
	C	Wall Up/Down	20	20 W/m	1917 lm/m			50	5000K		Louvered**	CA	Casambi	CU	Custom	
H60100IP	P	Pendant (Wire)	24	24 W/m	2300 lm/m			TW	Tunable White	Wx	White	T2	Tunable White			
	D	Pendant (Rod)	26	26W/m	2491 lm/m						Louvered**					
	U	Pendant Up/Down (Wire)	28	28 W/m	2683 lm/m			TR	Tack							
			32	32 W/m	3066 lm/m			MS	Mini Spot							
			35	35W/m	3354 lm/m			MP	Micro Prismatic							
	Y	Pendant Up/Down (Rod)	36	36 W/m	3450 lm/m				Clera							
40			40 W/m	3833 lm/m												

HAWKO Lighting reserve the right to change any data without notification

Codes identified on the second page of the data sheet

Optics

Louvers



B8 - Black Wide 80°
B5 - Black Medium 50°
B3 - Black Narrow 35°
BO - Black Oval 25 + 70°
BA - Black Asymmetric
W8 - White Wide 80°
W5 - White Medium 50°
W3 - White Narrow 35°
WO - White Oval 25 + 70°
WA - White Asymmetric

Linear Lenses

*Not compatible with Tunable white configuration



L1 - Glare Control Lens 110°
L9 - Glare Control Lens 90°
L6 - Glare Control Lens 60°
L3 - Glare Control Lens 30°
LO - Glare Control Lens 30° + 60° Oval
LA - Glare Control Lens Asymmetric
LD - Glare Control Lens Double Asymmetric
LW - Glare Control Lens Wall Grazing

Opal Diffusers



OD - Opal Diffuser
MP - Micro Prismatic Diffuser Clear (Direct Only)

Track



TR - Track

Mini Spots



MS - Mini Spot