

# H60140




IP40

240V



\*Cyanosis compliant on request

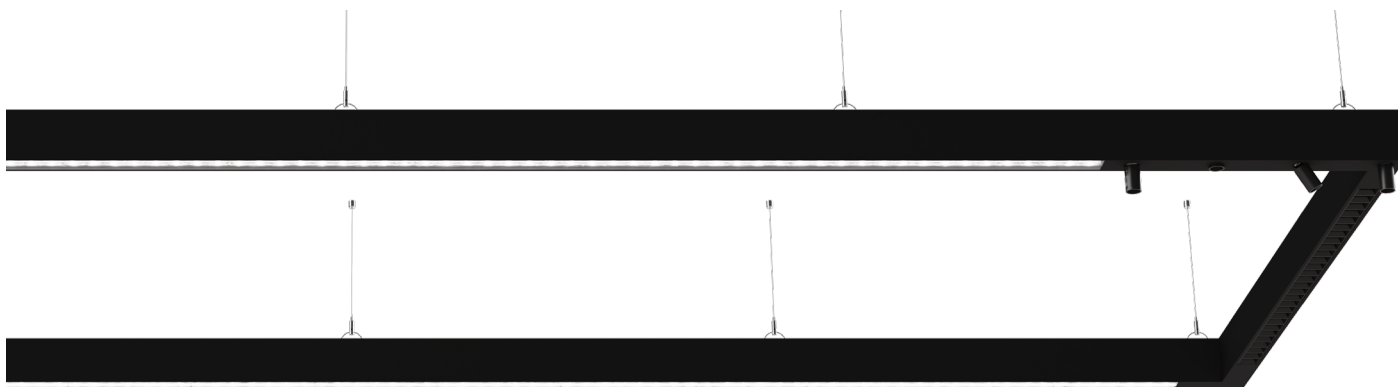


## Key Features


- Complies with relevant Australian Standards
- Screwless end caps (On Request)
- Emergency Options available (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Australian manufactured

## Dimensions

Profile




## Colour Options



## Mounting

Wire Pendant (P)    Up/Down Wire (U)    Wall Up & Down Mounted (C)    Wall Mounted (W)  
Rod Pendant (D)    Up/Down Rod (Y)

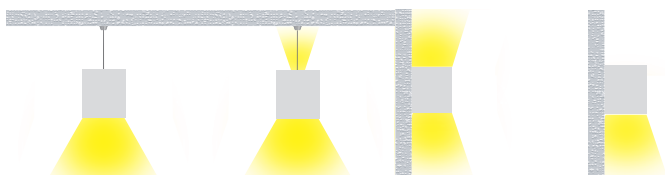

## Code

Example:

H60140- P129030ODD010 - 2400

| Code   | Mounting |                        | Power |        |           | CRI |        | CCT |               | Optics |                 | Driver |               | Finish |        | Length |
|--------|----------|------------------------|-------|--------|-----------|-----|--------|-----|---------------|--------|-----------------|--------|---------------|--------|--------|--------|
| H60140 | W        | Wal Mounted            | 12    | 12 W/m | 1008 lm/m | 80  | CRI>80 | 30  | 3000K         | OD     | Opal            | DO     | Non-Dim       | 10     | Black  | - XXXX |
|        | C        | Wall Up/Down           | 16    | 16 W/m | 1344 lm/m | 90  | CRI>90 | 35  | 3500K         | Lx     | Linear Lens**   | DA     | DALI          | 11     | White  |        |
|        | P        | Pendant (Wire)         | 20    | 20 W/m | 1680 lm/m |     |        | 40  | 4000K         | Bx     | Black           | SW     | Switch-Dim    | 75     | Gray   |        |
|        | D        | Pendant (Rod)          | 24    | 24 W/m | 2016 lm/m |     |        | 50  | 5000K         |        | Louvered**      | CA     | Casambi       | CU     | Custom |        |
|        | U        | Pendant Up/Down (Wire) | 28    | 28 W/m | 2352 lm/m |     |        | TW  | Tunable White | Wx     | White           | T2     | Tunable White |        |        |        |
|        |          |                        | 32    | 32 W/m | 2688 lm/m |     |        |     |               |        | Louvered**      |        |               |        |        |        |
|        | Y        | Pendant Up/Down (Rod)  | 36    | 36 W/m | 3024 lm/m |     |        |     |               | TR     | Tack            |        |               |        |        |        |
|        |          |                        | 40    | 40 W/m | 3360 lm/m |     |        |     |               | MS     | Mini Spot       |        |               |        |        |        |
|        |          |                        | 44    | 44 W/m | 3696 lm/m |     |        |     |               | MP     | Micro           |        |               |        |        |        |
|        |          |                        | 48    | 48 W/m | 4032 lm/m |     |        |     |               |        | Prismatic Clear |        |               |        |        |        |

# HAWKO Lighting reserve the right to change any data without notification

## Codes identified on the second page of the data sheet

## Optics

### Louvers



B8 - Black Wide 80°  
B5 - Black Medium 50°  
B3 - Black Narrow 35°  
BO - Black Oval 25 + 70°  
BA - Black Asymmetric  
W8 - White Wide 80°  
W5 - White Medium 50°  
W3 - White Narrow 35°  
WO - White Oval 25 + 70°  
WA - White Asymmetric

### Linear Lenses



L1 - Glare Control Lens 110°  
L9 - Glare Control Lens 90°  
L6 - Glare Control Lens 60°  
L3 - Glare Control Lens 30°  
LO - Glare Control Lens 30° + 60° Oval  
LA - Glare Control Lens Asymmetric  
LD - Glare Control Lens Double Asymmetric  
LW - Glare Control Lens Wall Grazing

### Opal Diffusers



OD - Opal Diffuser  
MP - Micro Prismatic Clear

### Track



TR - Track

### Mini Spots



MS - Mini Spot