


24V


5  
YR  
WARRANTY

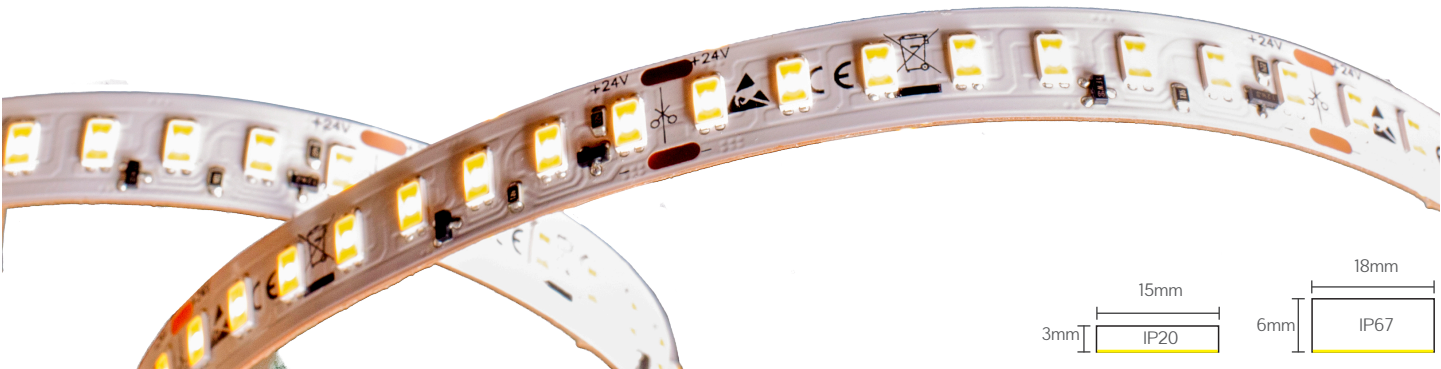

Key Features

- 24V Input
- IP20 or IP67 options available
- A variety of Colour temperatures (2700K, 3000K, 4000K)
- HYPERFLEX must be installed with a heatsink
- L90 > B10 > 54000hrs
- Operating temperature: -20° to +60°

Dimensions

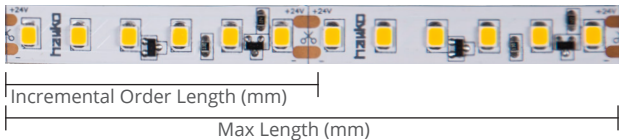

|                               | HYPERFLEX |      |
|-------------------------------|-----------|------|
| W/m                           | 11.5      | 25   |
| Incremental Order Length (mm) | 125       | 55.6 |
| Max Length (m)                | 5         | 5    |

# Image used is only for reference

Technical Information

| HYPERFLEX                                   |          |          |                     |          |          |                    |          |          |
|---------------------------------------------|----------|----------|---------------------|----------|----------|--------------------|----------|----------|
| 24V                                         |          |          |                     |          |          |                    |          |          |
| CRI>80                                      |          |          |                     |          |          |                    |          |          |
| HYPERFLEX must be installed with a heatsink |          |          |                     |          |          |                    |          |          |
| Non-Dim, DALI-Dim, Casambi, Phase Dim       |          |          |                     |          |          |                    |          |          |
| IP20                                        |          |          |                     |          |          | IP67               |          |          |
| 11.5W/m                                     |          |          | 25W/m               |          |          | 11.5W/m            |          |          |
| 2700K                                       | 3000K    | 4000K    | 2700K               | 3000K    | 4000K    | 2700K              | 3000K    | 4000K    |
| 2100lm/m                                    | 2170lm/m | 2300lm/m | 4500lm/m            | 4600lm/m | 5000lm/m | 2100lm/m           | 2170lm/m | 2300lm/m |
| 64 LED's per metre                          |          |          | 144 LED's per metre |          |          | 64 LED's per metre |          |          |

Code

Example: HYPERFLEX - 122030-2447

| Code      | Power    |                  | IP       |              | CCT            |                         | Length |
|-----------|----------|------------------|----------|--------------|----------------|-------------------------|--------|
| HyperFlex | 12<br>25 | 11.5W/m<br>25W/m | 20<br>67 | IP20<br>IP67 | 27<br>30<br>40 | 2700K<br>3000K<br>4000K | - XXXX |

# HAWKO Lighting reserve the right to change any data without notification