

# H95117




## Key Features


- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- 4.7kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime
- Direct & Indirect illumination

## Dimensions

Profile




## Colour Options

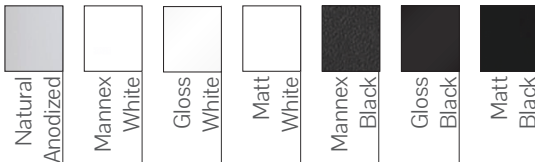

## Mounting

- Wire Pendant (P)    Up/Down Wire (U)    Wall Up & Down Mounted (C)    Wall Mounted (W)  
Rod Pendant (D)    Up/Down Rod (Y)    Wall Mounted Adjustable (A)

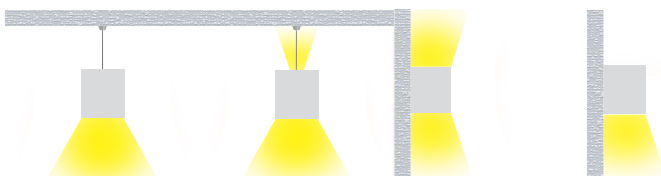

## Code

Example: H95117 - P168030ODD011 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H95117	P Wire Pendant	16 16W/m	2892lm/m	80 CRI>80	30 3000K	OD Opal	DO Non-Dim	79 - XXXX
	D Rod Pendant	19 19 W/m	3550lm/m	90 CRI>90	40 4000K	DA DALI	11 Mannex	
	U Up/Down Wire	26 26 W/m	4680lm/m		50 5000K	PD Push-Dim	12 White	
	Y Up/Down Rod	35 35 W/m	5996lm/m		TW 2700K - 6500K	CA Casambi	13 Matt White	
	W Fixed Wall					TW Tunable White	10 Mannex Black	
	A Adjustable wall						9 Gloss Black	
	C Wall Up/Down						8 Matt Black	
							CU Custom	

# FOS Lighting reserve the right to change any data without notification

\*\*Lumens are delivered lumens for both direct & indirect at the same time

\*\*CRI 80 as standard