


# PHHB2222




## Key Features

- Minimum bend diameter - 400mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Horizontal
- Cut Length (Monochrome) - 50mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


## Mounting Accessories



## Connectors

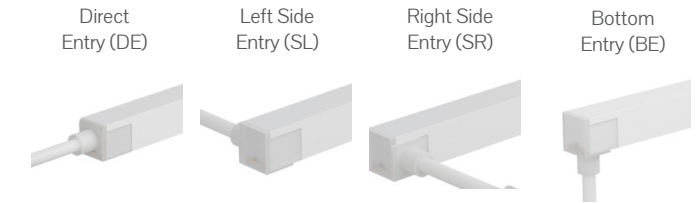

## Accessory Dimensions

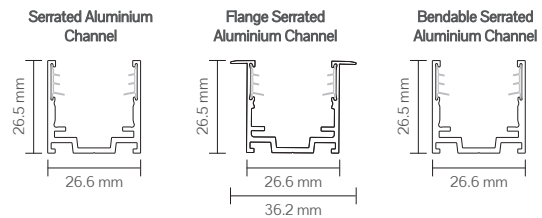

## Code

Example: PHHB2222 - 178022DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			Connector		Driver		Length
	12	15	80	CRI>80	22	27	30	35	40	57	DO	
PHHB2222	12	12	80	CRI>80	22	2200K	950	DE	Direct Entry	DO	Non-Dim	-xxxx
	15	15			27	2700K	1000	SL	Left side entry	DA	DALI	
	17	16.5			30	3000K	1000	SR	Right side entry	CA	Casambi	
					35	3500K	1100	BE	Bottom Entry	SW	Switch Dim	
	40	4000K			1100	TW	2200K-5700K	PH	Phase Dim			
	57	5700K			1000	DW	1800K-3000K	RC	2.4Ghz Remote Control			
	RGB	RGB			R2	RGBW (2700K)	R3	RGBW (3000K)	R4	RGBW (4000K)		

# Lumen/m figures based on, 12W, CRI>80. ## FOS Lighting reserve the right to change any data without notification.