



24V
5 YR WARRANTY



Key Features

- 24V Input
- IP20 or IP67 options available
- Variety of colours available
- COLOURFLEX must be installed with a heatsink
- L70 at 50000hrs
- Operating temperature: -20° to +60°

Dimensions

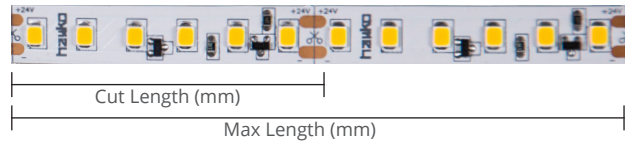

W/m	14.4
Cut Length (mm)	100
Max Length (m)	10

Image used is only for reference

Technical Information

COLOURFLEX			
24V			
COLOURFLEX must be installed with a heatsink			
Non-Dim, DALI-Dim, Casambi, DMX, 2.4Hz wireless remote control			
IP20/IP67			
14.4			
RGB	Red	Green	Blue
350-410lm/m	360-300lm/m	460-500lm/m	220-260lm/m
72 LED's per metre			

Code


Example: COLOURFLEX - 1420RGB-1200

Code	Power	IP	CCT	Length
COLOURFLEX	14 14.4W/m	20 67 IP20 IP67	RGB RD GR BL RGB Red Green Blue	-xxxx


HAWKO Lighting reserve the right to change any data without notification

LED FLEX & PROFILE CONFIGURATION


16 Corner
H1616CR




18 Slim
H1807




18 Square
H1815




18 Multi
H1819




22 Square
H2215




36 Slim
H3518




36 Proud
H3640



36D
H3640D




60 Round
H60T



18 Slim
Recessed
H1707R



22 Recessed
H2215R



ECOFLEX G2 IP20 8mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
ECOFLEX G2 IP67 12mm x 6mm					X	X	X	X	X		X
HYPERFLEX IP20 15mm x 3mm					X	X	X	X	X		X
HYPERFLEX IP67 18mm x 6mm						X	X	X	X		
XFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
XFLEX IP67 13mm x 6mm					X	X	X	X	X		X
WHITEFLEX IP20 10mm x 2mm	X	X	X	X	X	X	X	X	X	X	X
WHITEFLEX IP67 12mm x 2mm					X	X	X	X	X		X
CHROMAFLEX IP20 12mm x 3mm					X	X	X	X	X		X
CHROMAFLEX IP67 14mm x 6mm					X	X	X	X	X		X
COLOURFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
COLOURFLEX IP67 14mm x 6mm					X	X	X	X	X		X