


HE7698HR

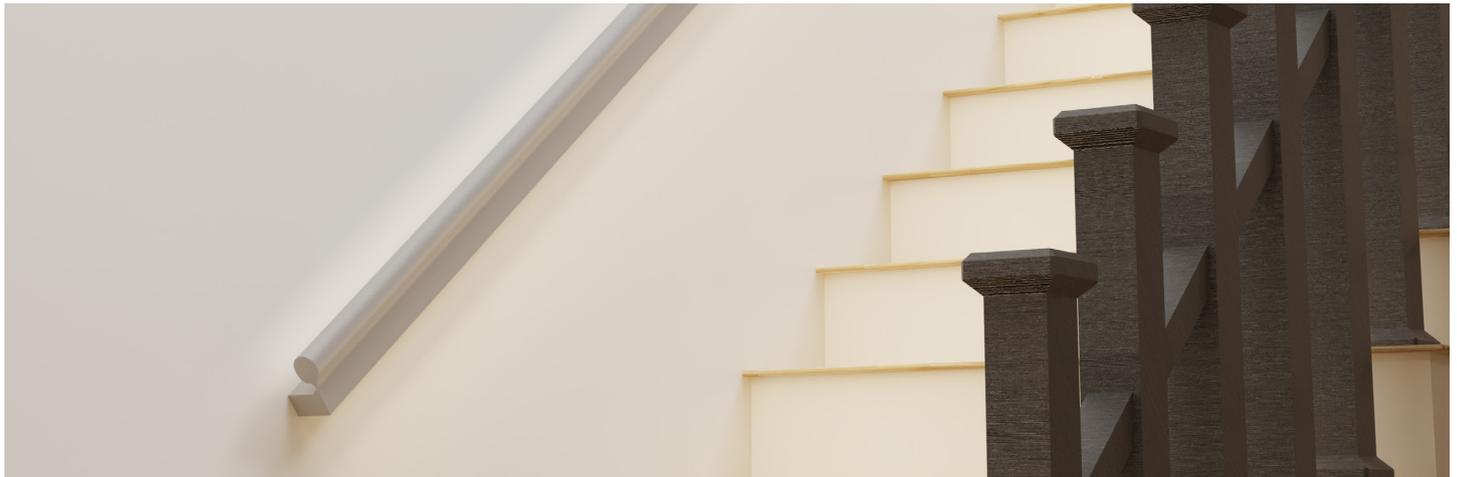


Key Features


- Easy installation
- Max module lengths are 3m
- Butt joins to create longer lengths
- Metal endcap

Dimensions

Profile



Colour Options

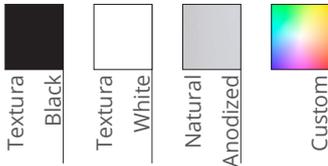

Technical Information

ECO FLEX G2												
IP20/IP67												
CRI>80												
Heatsink required for installation												
4.8W/m (5)			9.6W/m (10)			14.4W/m (15)			19.2W/m (20)			
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	
500lm/m	520lm/m	575lm/m	1000lm/m	1050lm/m	1150lm/m	1530lm/m	1630lm/m	1730lm/m	2050lm/m	2150lm/m	2300lm/m	

Code

Example: HE7698HR -C-05-20-90-40-OD-D0-10-2500

Code	Mounting	Power (Direct - Indirect)	CRI	CCT	Optics	Driver	Finish	Length
HE7698HR	V76x98mm Hand Rail	W Wall Direct or Indirect C Wall Direct/ Indirect	05 4.8W/m 10 9.6W/m 15 14.4W/m 20 19.2W/m	90 CRI-90 95 CRI>95	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 65 6500K TW 2500K-6000K RGB RGB RGBW3K RGBW 3000K RGBW4K RGBW 4000K RGBW6K RGBW 6000K	OD Opal D0 Non-Dim DA DALI D4 DALI RGBW SW Switch-Dim CA Casambi C4 Casambi (TW/ RGB/RGBW)	10 Black 11 White 79 Natural CU Anodised Custom	- XXXX

FOS Lighting reserve the right to change any data without notification