

H6060E



*Cyanosis compliant on request




Key Features


- Complies with relevant Australian Standards
- Even light distribution
- Screwless end caps (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Plug and play
- Australian manufactured

Dimensions

Profile




Colour Options



Mounting

Surface Mounted (S) Wire Pendant (P) Up/Down Wire (U) Recessed Trimless (T) Wall Up & Down Mounted (C) Wall Mounted (W)

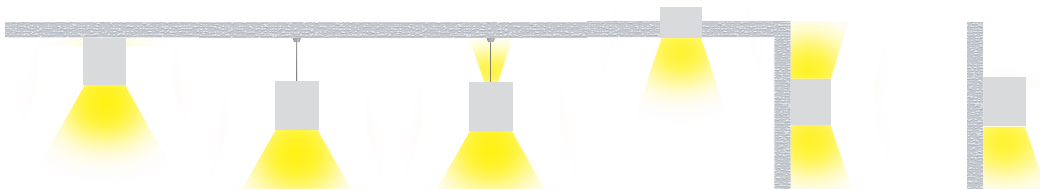

Code

Example: **H6060E - S128030ODDO10 - 2400**

Code	Mounting		Power			CRI		CCT		Optics		Driver		Finish		Length							
	S	T	W	C	P/D	U/Y	W/m	lm/m	80	90	30	35	40	50	TW		DO	DA	SW	CA	T2	10	11
H6060E	S	Surface Mounted	12	12 W/m	840lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX							
	T	Trimless Recessed	16	16 W/m	1120lm/m	90	CRI>90	35	3500K														
	W	Wall Mounted	20	20 W/m	1400lm/m			40	4000K			DA	DALI	11	White								
	C	Wall Up/Down	24	24 W/m	1680lm/m			50	5000K			SW	Switch-Dim	75	Grey								
	P/D	Pendant	28	28 W/m	1960lm/m			TW	2700K-6500K			CA	Casambi	CU	Custom								
	U/Y	Pendant Up/Down	32	32 W/m	2240lm/m																		
			36	36 W/m	2520lm/m																		
			40	40 W/m	2800lm/m																		
		44	44 W/m	3080lm/m																			
		48	48 W/m	3360lm/m																			

FOS Lighting reserve the right to change any data without notification

**Luminous flux figures based on Opal, 4000K, CRI>90