

18 MULTI - H1819




Key Features


- Dot free illumination with 120 LED/m strips
- Easy installation
- Max module lengths are 2.5m
- Butt joins to create longer lengths
- 2 clear mounting clips per metre of extrusion
- 45 & 90 bends available (custom bends available upon request)
- Grey PMMA screwless end caps

Dimensions

Profile




Mounting Bracket



Colour Options



Optic Options

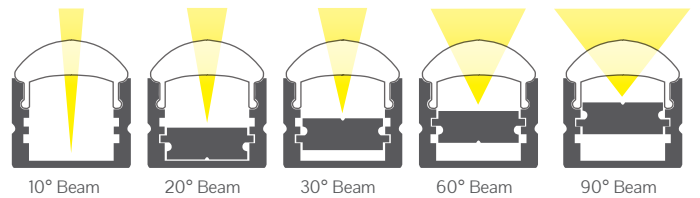

Technical Information

X FLEX				COLOURFLEX		WHITEFLEX	
2700K / 3000K / 4000K				RGB / Red / Green / Blue / Yellow		2500K-6000K	
CRI>90						CRI>80	
IP20				IP20		IP20	
4W/m (4)	8W/m (8)	12W/m (12)	16W/m (16)	14.4W/m (14)	19.2W/m (20)		
520lm/m	1040lm/m	1560lm/m	2080lm/m	350-410 (RGB)	1680lm/m		
No heatsink required for installation				Heatsink required for installation		Heatsink required for installation	

Lumens are based off 4000K values ##See individual LED Flex data sheet for full break down

Code

Example:

H1819 - S049027C1D079 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H1819	S Surface Mounted	04 4W/m	80 CRI>80 90 CRI>90	27 2700K	C1 Clear 10° C2 Clear 20° C3 Clear 30° C6 Clear 60° C9 Clear 90°	DO Non-Dim DA DALI SW Switch-Dim CA Casambi T2 Tunable White	79 Anodised CU Custom	- XXXX
		08 8W/m		30 3000K				
		12 12W/m		40 4000K				
		16 16W/m		TW 2700K-6000K				
		14 14.4W/m		RGB				
		20 19.2W/m		RGB				

HAWKO Lighting reserve the right to change any data without notification