
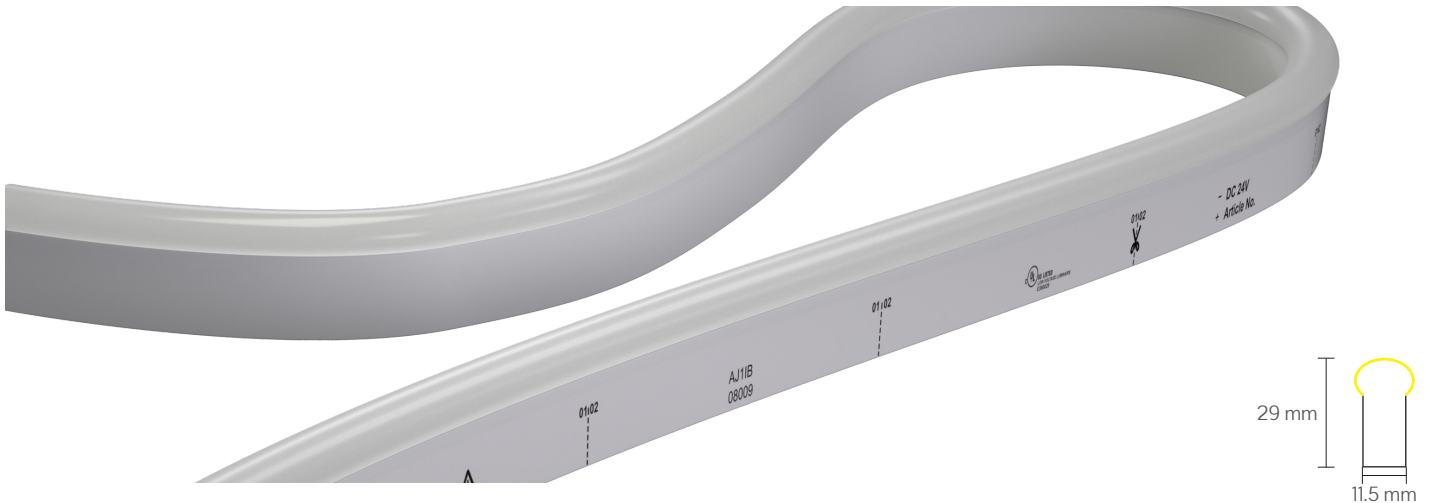



# PHHB1229




## Key Features

- Minimum bend diameter - 120mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Horizontal Bending
- Cut Length (Monochrome) - 83.3mm
- Cut Length (Tunable white / Dim to Warm) - 83.3mm
- Cut Length (RGB / RGBW) - 100mm
- DMX Pixel Light options available on request


## Connectors

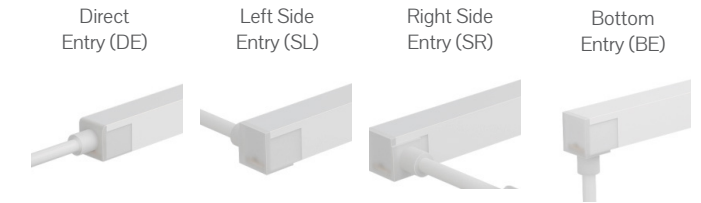

## Mounting Accessories

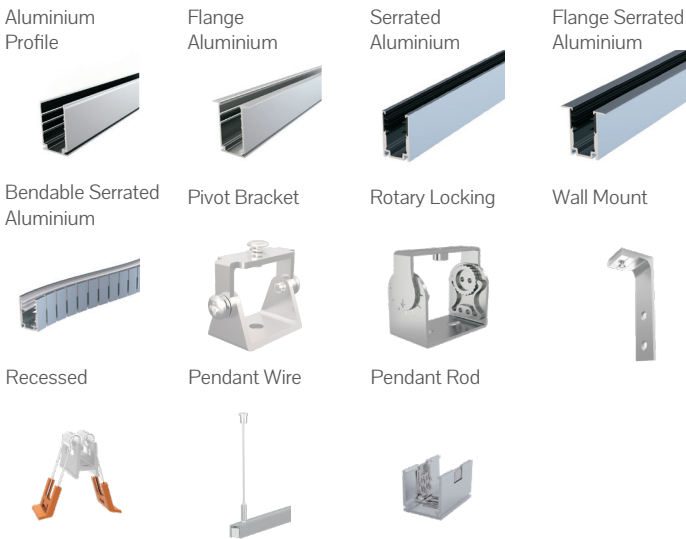

## Accessory Dimensions

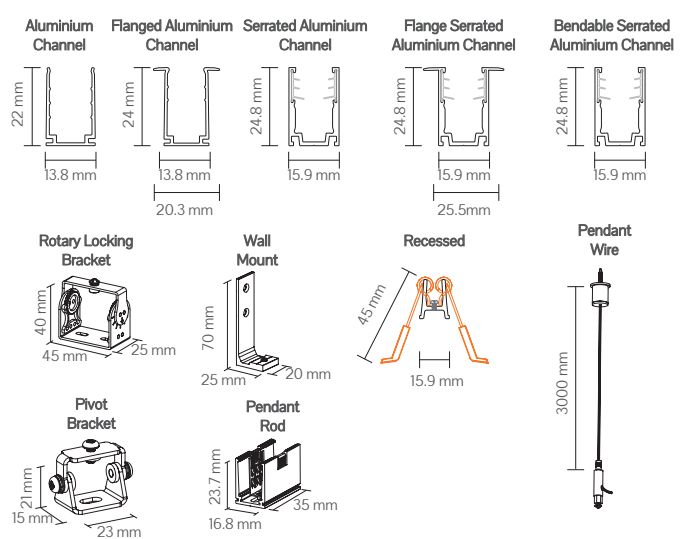

## Code

Example: PHHB1229 - 068022DED0 - 2400

Code	Wattage (W/m)		CRI	CCT			Connector		Driver		Length				
				lm/m											
PHHB1229	06	6	80	22	2200K	380	DE	Direct Entry	DO	Non-Dim	-xxxx				
	09	9		27	2700K	470									
	12	12	90	30	3000K	470						SL	Left side entry	DA	DALI
	15	15		35	3500K	470									
				40	4000K	470						SR	Right side entry	CA	Casambi
				57	5700K	470									
				TW	2200K-5700K							BE	Bottom Entry	SW	Switch Dim
				DW	1800K-3000K										
				RGB	RGB							PH	Phase Dim	RC	2.4Ghz Remote Control
				R2	RGBW (2700K)										
				R3	RGBW (3000K)										
				R4	RGBW (4000K)										

# Lumen/m figures based on, 12W, CRI>80.

## FOS Lighting reserve the right to change any data without notification. ### CRI>90 only in 12W/m in 2700K, 3000K, 3500K, 4000K