
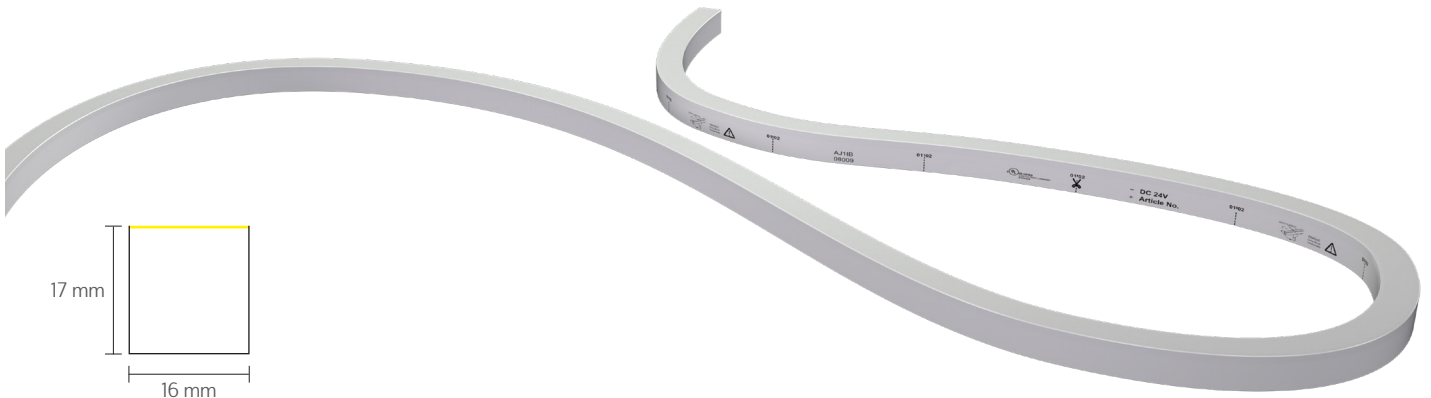



HSHB1617



Key Features

- Minimum bend diameter - 300mm
- Ambient working temperature: MAX (+)95°C
- Bending Direction - Vertical
- Cut Length (Monochrome) - 55.6mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


Connectors

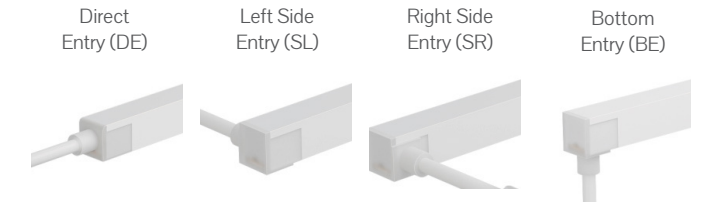

Mounting Accessories



Accessory Dimensions

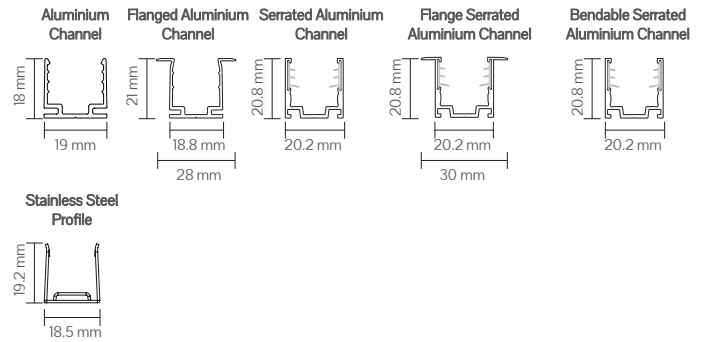

Code

Example: HSHB1617 - 068022DEDO-2400

Code	Wattage (W/m)	CRI	CCT	lm/m	Connector	Driver	Length
HSHB1617	06 6W/m	80 CRI>80	22 2200K	230	DE Direct Entry	DO Non-Dim	-XXXX
			27 2700K	260	SL Left side entry	DA DALI	
			30 3000K	260	SR Right side entry	CA Casambi	
			35 3500K	260	BE Bottom Entry	SW Switch Dim	
			40 4000K	260		PH Phase Dim	
			57 5700K	260		RC 2.4Ghz Remote Control	
			65 6500K	260			
			TW 2200K - 5700K				
			R2 RGBW (2700K)				
			R3 RGBW (3000K)				
R4 RGBW (4000K)							
	05 4.5W/m		RGB RGB				

Lumen/m figures based on, 6W, CRI>80. ## FOS Lighting reserve the right to change any data without notification.