




PHVB2219




Key Features

- Minimum bend diameter - 400mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Vertical
- Cut Length (Monochrome) - 50mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


Connectors

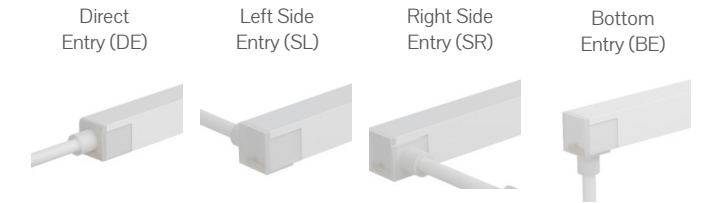

Mounting Accessories



Accessory Dimensions

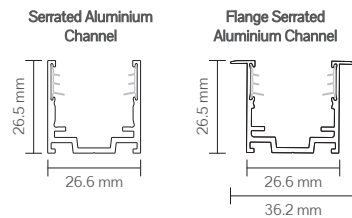

Code

Example: PHVB2219 - 78022DEDO - 2400

Code	Wattage (W/m)		CRI	CRI>80	CCT			Connector		Driver		Length
						lm/m						
PHVB2219	12	12	80	CRI>80	22	2200K	1200	DE	Direct Entry	DO	Non-Dim	-xxxx
	15	15			27	2700K	1300	SL	Left side entry	DA	DALI	
	17	16.5			30	3000K	1300	SR	Right side entry	CA	Casambi	
					35	3500K	1400	BE	Bottom Entry	SW	Switch Dim	
	40	4000K			1400	PH	Phase Dim					
	57	5700K			1300	RC	2.4Ghz Remote Control					
	TW	2200K-5700K										
	DW	1800K-3000K										
	RGB	RGB										
	R2	RGBW (2700K)										
	R3	RGBW (3000K)										
	R4	RGBW (4000K)										

Lumen/m figures based on, 12W, CRI>80. ## FOS Lighting reserve the right to change any data without notification.