

# 35 CURVED - H3535C




## Key Features


- 300mm minimum bend radius
- Even illumination
- Complete with mounting components
- Complies with relevant Australian standards
- Detailed shop drawings
- Typical length is 2.5m (Longer lengths available on request)
- Other RAL colours available on request

## Dimensions

Profile




## Colour Options



## Mounting

Surface Mounted (S) Wire Pendant (P)  
Rod Pendant (D)

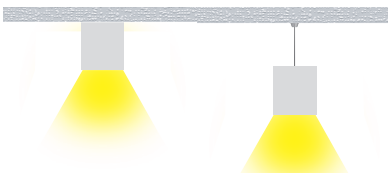

## Code

Example: H3535C - S108030ODD010 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H3535C	S Surface Mounted	5 4.8W/m 270lm/m	80 CRI>80	30 3000K	OD Opal	DO Non-Dim	10 Black 11 White CU Custom	- XXXX
	P Wire Pendant	10 9.6W/m 539lm/m	90 CRI>90	35 3500K		DA DALI		
	D Rod Pendant	15 14.4W/m 808lm/m		40 4000K		SW Switch-Dim		
		28 28.8W/m 1616lm/m		50 5000K		CA Casambi		
				RGB3 RGBW 3000K	D4 DALI RGBW			
				RGB4 RGBW 4000K	C4 Casambi RGBW			