



# HSVB1617



## Key Features

- Minimum bend diameter - 300mm
- Ambient working temperature: MAX (+)95°C
- Bending Direction - Vertical
- Cut Length (Monochrome) - 55.6mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


## Connectors

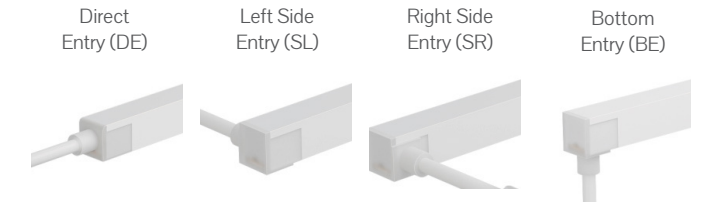

## Mounting Accessories



## Accessory Dimensions

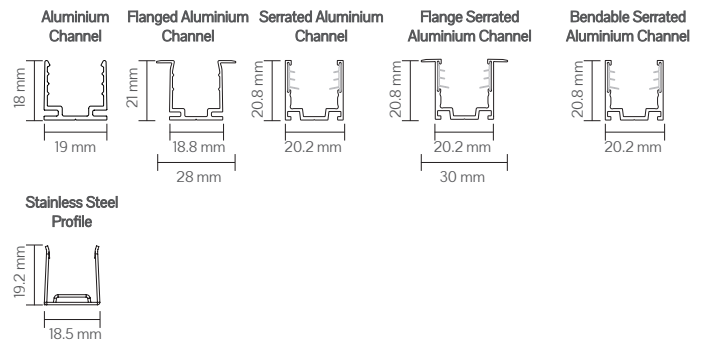

## Code

Example: HSVB1617 - 068022DEDO-2400

Code	Wattage (W/m)	CRI	CCT	lm/m	Connector	Driver	Length		
HSVB1617	06 6W/m	80 CRI>80	22 2200K	330	DE Direct Entry	DO Non-Dim	-XXXX		
			27 2700K	350	SL Left side entry	DA DALI			
			30 3000K	350	SR Right side entry	CA Casambi			
			35 3500K	350	BE Bottom Entry	SW Switch Dim			
			40 4000K	350		PH Phase Dim			
			57 5700K	350		RC 2.4Ghz Remote Control			
			65 6500K	350					
			TW 2200K - 5700K						
			R2 RGBW (2700K)						
			R3 RGBW (3000K)						
			R4 RGBW (4000K)						
			05 4.5W/m		RGB	RGB			

# Lumen/m figures based on, 6W, CRI>80. ## FOS Lighting reserve the right to change any data without notification.