




Key Features

- 24V Input
- IP20 or IP67 options available
- A variety of Colour temperatures (2700K, 3000K, 4000K)
- 2SDCM colour accuracy
- XFLEX can be installed without a heat sink
- L90 B10 > 54000hrs
- Operating temperature: -20° to +60°
- Integral constant circuitry with on-board temperature control

Dimensions

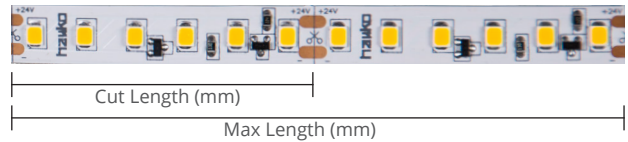

W/m	4	8	12	16
Cut Length (mm)	55	55	55	55
Max Length (m)	10	10	10	10

Image used is only for reference

Technical Information

XFLEX											
24V											
CRI>90											
XFLEX can be installed without a heatsink											
Non-Dim, DALI-Dim, Casambi, Phase Dim											
IP20/IP67			IP20/IP67			IP20/IP67			IP20/IP67		
4W/m			8W/m			12W/m			16W/m		
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
460lm/m	480lm/m	520lm/m	920lm/m	960lm/m	1040lm/m	1380lm/m	1440lm/m	1560lm/m	1840lm/m	1920lm/m	2080lm/m
126 LED's per metre			126 LED's per metre			126 LED's per metre			126 LED's per metre		

Code


Example: **XFLEX-42027-1100**

Code	Power	IP	CCT	Length
XFlex	4 8 12 16 4W/m 8W/m 12W/m 16W/m	20 67 IP20 IP67	27 30 40 2700K 3000K 4000K	- XXXX


HAWKO Lighting reserve the right to change any data without notification

LED FLEX & PROFILE CONFIGURATION


16 Corner
H1616CR




18 Slim
H1807




18 Square
H1815




18 Multi
H1819




22 Square
H2215




36 Slim
H3518




36 Proud
H3640



36D
H3640D




60 Round
H60T



18 Slim
Recessed
H1707R



22 Recessed
H2215R



ECOFLEX G2 IP20 8mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
ECOFLEX G2 IP67 12mm x 6mm					X	X	X	X	X		X
HYPERFLEX IP20 15mm x 3mm					X	X	X	X	X		X
HYPERFLEX IP67 18mm x 6mm						X	X	X	X		
XFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
XFLEX IP67 13mm x 6mm					X	X	X	X	X		X
WHITEFLEX IP20 10mm x 2mm	X	X	X	X	X	X	X	X	X	X	X
WHITEFLEX IP67 12mm x 2mm					X	X	X	X	X		X
CHROMAFLEX IP20 12mm x 3mm					X	X	X	X	X		X
CHROMAFLEX IP67 14mm x 6mm					X	X	X	X	X		X
COLOURFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
COLOURFLEX IP67 14mm x 6mm					X	X	X	X	X		X