
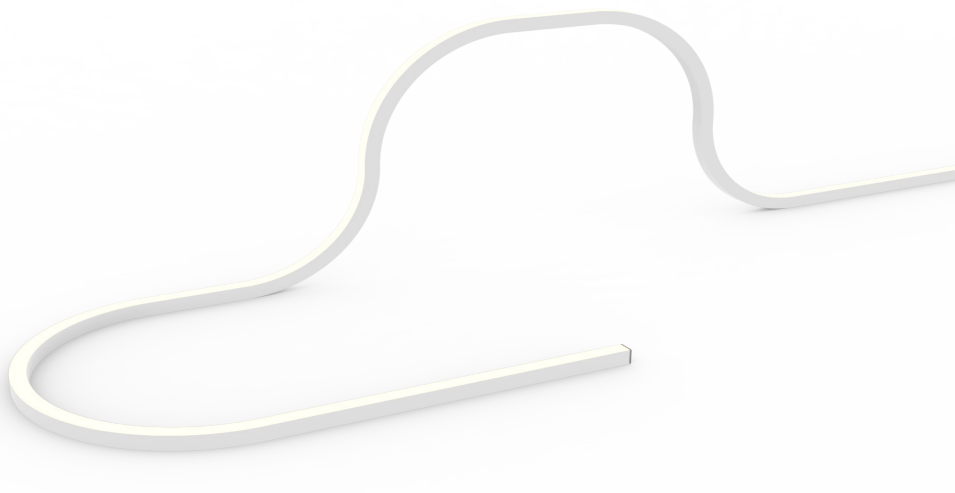


PHMB1617

IP68

IK08

24V



Key Features

- Minimum bend diameter - 300mm
- Dot free illumination
- 10m maximum single feed length (Monochrome)
- 6m Maximum single feed length (Tunable White)
- 8W/m (Monochrome), 12W/m (Tunable White)


Connectors

Direct Entry (DE)

Left Side Entry (SL)

Right Side Entry (SR)

Bottom Entry (BE)

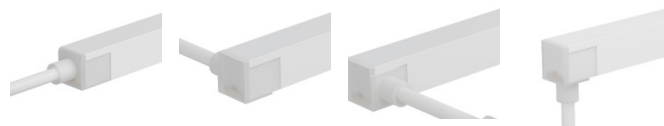


Mounting Accessories


Aluminium Profile




Flange Aluminium




Serrated Aluminium



Flange Serrated Aluminium




Bendable Serrated Aluminium



Anole Profile



Accessory Dimensions

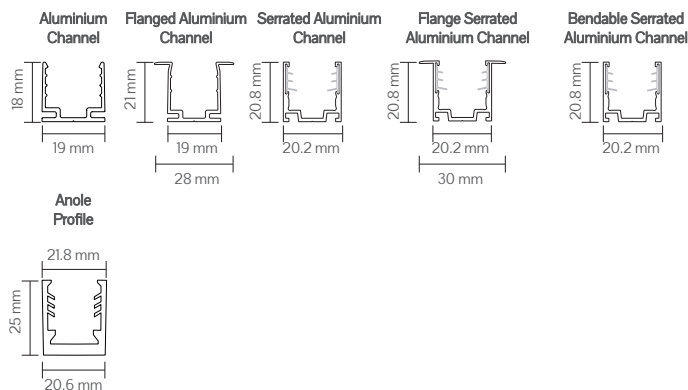

Code

Example:

PHMB1617-S-8-90-27-DE-D0-2400PHMB1617

Code	Mounting	Wattage (W/m)	CRI	CCT	Connector	Driver	Length
PHMB1617	S Surface Mounted	8 08W/m 12 12W/m	90 CRI>90	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 57 5700K TW 2700K-5700K	DE Direct SL Side Left Entry SR Side Right Entry BE Bottom Entry	D0 Non-Dim DA DALI-Dim SW Switch-Dim CA Casambi	-XXXX

HAWKO Lighting reserve the right to change any data without notification.

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product