


18 MULTI - HE1819




Key Features


- Dot free illumination with 120 LED/m strips
- Easy installation
- Max module lengths are 2.5m
- Butt joins to create longer lengths
- 2 clear mounting clips per metre of extrusion
- 45 & 90 bends available (custom bends available upon request)
- Grey PMMA screwless end caps

Dimensions

Profile




Mounting Bracket



Colour Options



Optic Options

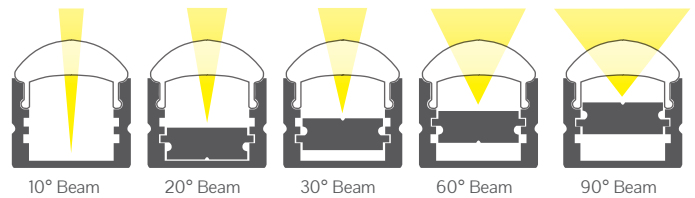

Technical Information

ECO FLEX G2												
IP20												
CRI>80												
Heatsink required for installation												
4.8W/m (5)			9.6W/m (10)			14.4W/m (15)			19.2W/m (20)			
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	
500lm/m	520lm/m	575lm/m	1000lm/m	1050lm/m	1150lm/m	1530lm/m	1630lm/m	1730lm/m	2050lm/m	2150lm/m	2300lm/m	

#See individual LED Flex data sheet for full break down

Code

Example:

HE1819 - S059027C1D011 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
HE1819	S Surface Mounted	5 4.8W/m 10 9.6W/m 15 14.4W/m 20 19.2W/m	80 CRI>80	27 2700K 30 3000K 40 4000K	C1 Clear 10° C2 Clear 20° C3 Clear 30° C6 Clear 60° C9 Clear 90°	DO Non-Dim DA DALI CA Casambi PD Phase Dim	79 Anodised	- XXXX

HAWKO Lighting reserve the right to change any data without notification