

24V


5
YR
WARRANTY



Key Features

- 24V Input
- IP20 or IP67 options available
- A variety of Colour temperatures (2700K, 3000K, 4000K)
- 2SDCM colour accuracy
- XFLEX can be installed without a heat sink
- L90 B10 > 54000hrs
- Operating temperature: -20° to +60°
- Integral constant circuitry with on-board temperature control

Dimensions



W/m	4	8	12	16
Incremental Order Length (mm)	55.6	55.6	55.6	55.6
Max Length (m)	10	10	10	10

Image used is only for reference

Technical Information

XFLEX											
24V											
CRI>90											
XFLEX can be installed without a heatsink											
Non-Dim, DALI-Dim, Casambi, Phase Dim											
IP20/IP67			IP20/IP67			IP20/IP67			IP20/IP67		
4W/m			8W/m			12W/m			16W/m		
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
460lm/m	480lm/m	520lm/m	920lm/m	960lm/m	1040lm/m	1380lm/m	1440lm/m	1560lm/m	1840lm/m	1920lm/m	2080lm/m
126 LED's per metre			126 LED's per metre			126 LED's per metre			126 LED's per metre		


Code

Example: XFLEX-42027-1100

Code	Power		IP		CCT		Length
XFlex	4	4W/m	20	IP20	27	2700K	- XXXX
	8	8W/m	67	IP67	30	3000K	
	12	12W/m			40	4000K	
	16	16W/m					

HAWKO Lighting reserve the right to change any data without notification

LEDFLEX & PROFILE CONFIGURATION

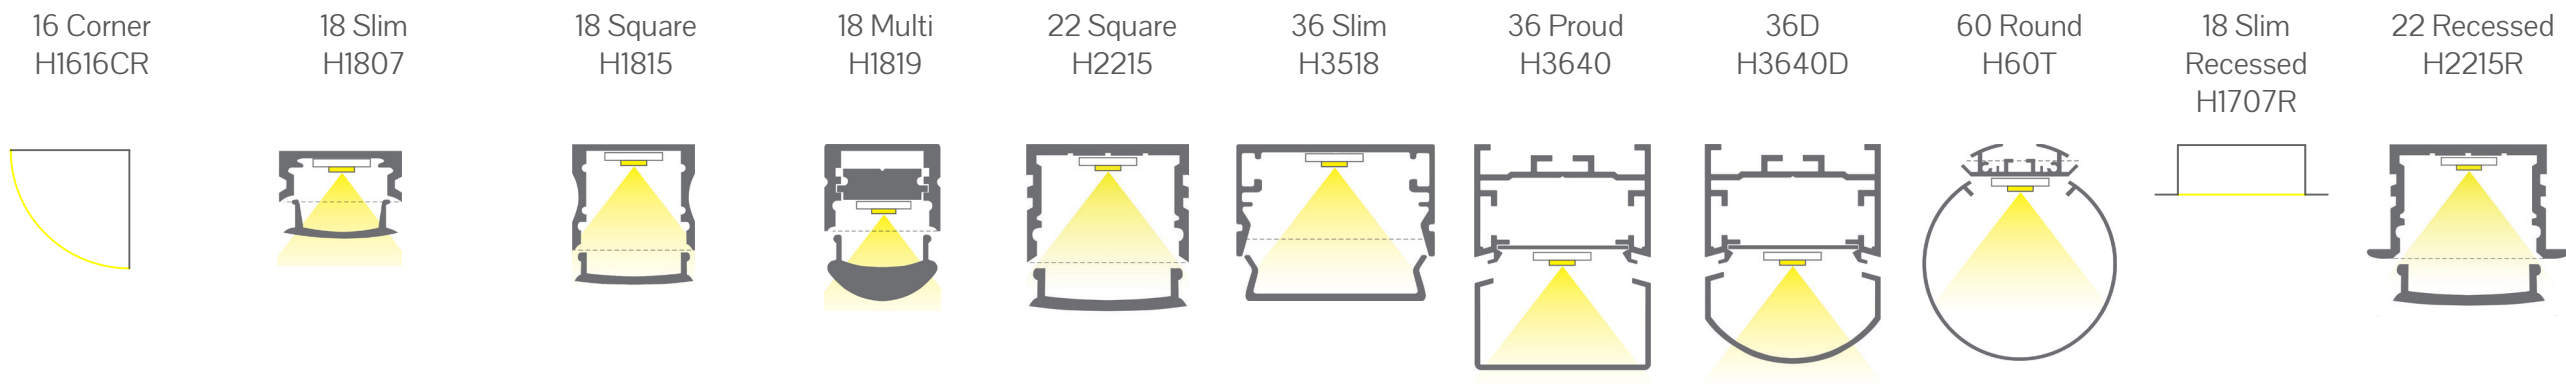

ECOFLEX G2 IP20 8mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
ECOFLEX G2 IP67 12mm x 6mm					X	X	X	X	X		X
HYPERFLEX IP20 15mm x 3mm					X	X	X	X	X		X
HYPERFLEX IP67 18mm x 6mm						X	X	X	X		
XFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
XFLEX IP67 13mm x 6mm					X	X	X	X	X		X
WHITEFLEX IP20 10mm x 2mm	X	X	X	X	X	X	X	X	X	X	X
WHITEFLEX IP67 12mm x 2mm					X	X	X	X	X		X
CHROMAFLEX IP20 12mm x 3mm					X	X	X	X	X		X
CHROMAFLEX IP67 14mm x 6mm					X	X	X	X	X		X
COLOURFLEX IP20 10mm x 3mm	X	X	X	X	X	X	X	X	X	X	X
COLOURFLEX IP67 14mm x 6mm					X	X	X	X	X		X