

H60100R

IP20

240V

5
YR
WARRANTY

TW

PRODUCT OF AUSTRALIA

CEC
Compliant


ZZ



Key Features

- Minimum length 600mm
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- Custom colours available on request
- Integral control gear

Dimensions

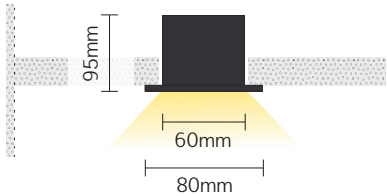

Colour Options

Anodic Natural

Matt (Gray)


White

Black

Custom


Mounting

Recessed (R)




Configurations

Standard Length

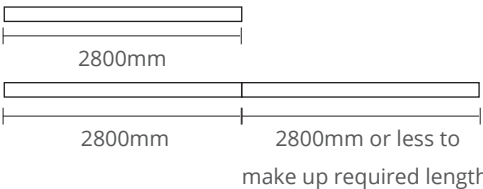

Angle

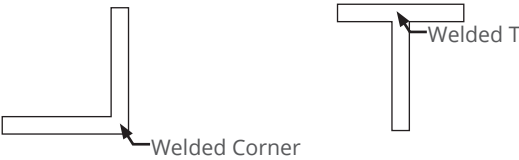

*Standard Lengths do not include Endcaps, and is only referencing extrusion length.


Configurations

Diffused



Order ID	Description
OD	Opal Diffused
MP	Micro Prismatic Diffuser
MF	Micro Prismatic Frosted Diffuser

Track



Order ID	Description
TR	Track


Louvers



Order ID	Description	Beam Angle
B3	Black Narrow Beam	35°
B5	Black Medium Beam	50°
B8	Black Wide Beam	80°
B0	Black Oval Beam	20° x 70°
BA	Black Asymmetric	Asymmetric
BW	Black Batwing	Batwing
W3	White Narrow Beam	35°
W5	White Medium Beam	50°
W8	White Wide Beam	80°
W0	White Oval Beam	20° x 70°
WA	White Asymmetric	Asymmetric
WB	White Batwing	Batwing



Linear Lenses

*Not compatible with Tunable white configuration



Order ID	Description	Beam Angle
L3	Glare Control Lens Narrow	30°
L6	Glare Control Lens Medium	60°
L9	Glare Control Lens Wide	90°
L1	Glare Control Lens Extra Wide	110°
LO	Glare Control Lens Oval	30° x 60°
LA	Glare Control Lens Asymmetric	Asymmetric
LD	Glare Control Lens Double Asymmetric	Double Asymmetric
LW	Glare Control Lens Wall Grazing	Wall Grazing

Track

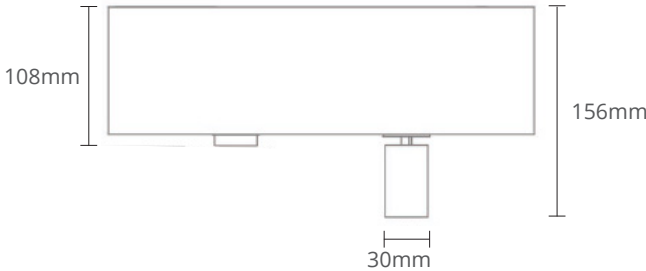


Order ID	Description
MS	Mini Spot

Technical

	12W/m	16W/m	19W/m	20W/m	24W/m	26W/m	28W/m	32W/m	35W/m	36W/m	40W/m
4000K	1150lm/m	1533lm/m	1845lm/m	1917lm/m	2300lm/m	2490lm/m	2683lm/m	3066lm/m	3354lm/m	3450lm/m	3833lm/m

Lumens values based on Opal, 4000K, CRI>90


Photometrics

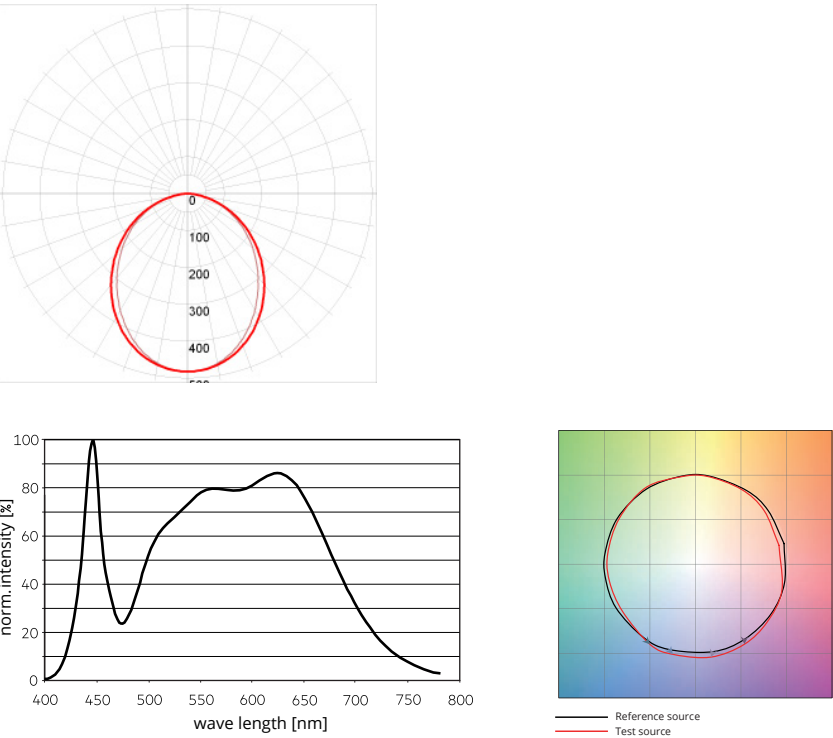

*Mapped CRI data was sourced from LED Manufacturers Data sheets, data shown is based on the LED boards not the luminaire

Accessories

Recessed Bracket



Code

Example: H60100R - R-12-90-40-OD-D0-10-2800

Code	Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
H60100R	R	Recessed (direct)	12	12 W/m	80	CRI>80	30	3000K	OD	Opal	D0	Non-Dim	10	Black	- XXXX
			16	16 W/m	90	CRI>90	35	3500K			DA	DALI	11	White	
			20	20 W/m			40	4000K			SW	Switch-Dim	75	Anodic Natural	
			24	24 W/m			50	5000K			CA	Casambi		Matt	
			28	28 W/m			65	6500K			T2	Tunable White	CU	Custom	
			32	32 W/m			TW	2700K - 6000K							
			36	36 W/m											
			40	40 W/m											

HAWKO Lighting reserve the right to change any data without notification