


24V


5
YR
WARRANTY

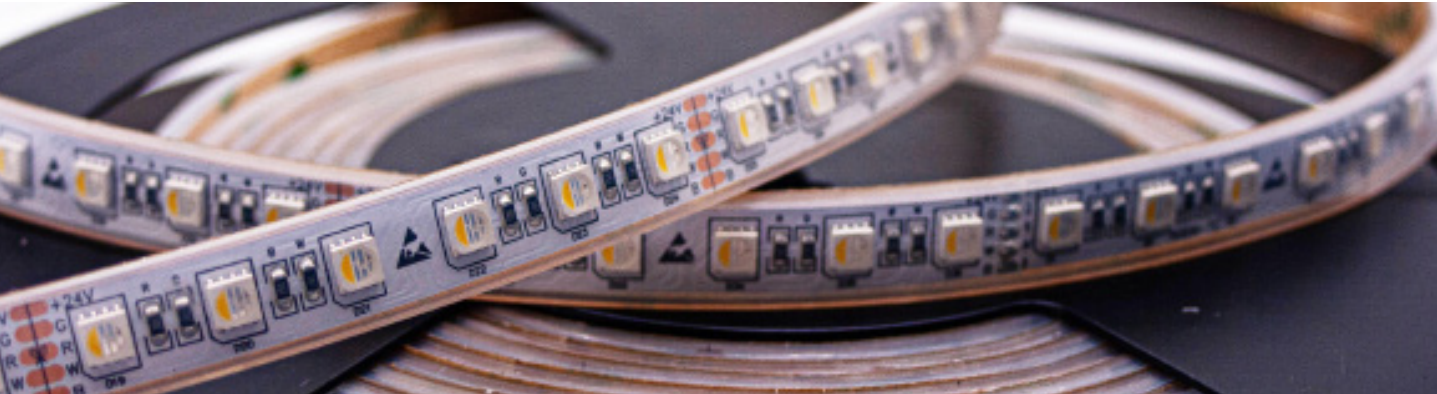

Key Features

- 24V Input
- IP20 or IP67 options available
- CHROMAFLEX must be installed with a heatsink
- L70 at 50000hrs
- Operating temperature: -20° to +60°

Dimensions

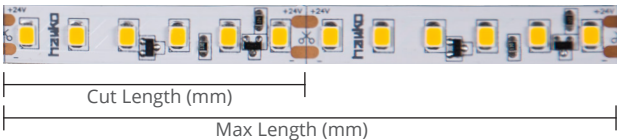

W/m	19.2	23	30
Cut Length (mm)	100	83.3	62.5
Max Length (m)	10	8	5

Image used is only for reference

Technical Information

CHROMAFLEX								
24V								
CHROMAFLEX must be installed with a heatsink								
Non-Dim, DALI-Dim, Casambi, Phase Dim, 2.4Hz wireless remote control								
IP20/IP67			IP20/IP67			IP20/IP67		
19.2W/m			23W/m			30W/m		
RGBW 3000K	RGBW 4000K	RGBW 6000K	RGBW 3000K	RGBW 4000K	RGBW 6000K	RGBW 3000K	RGBW 4000K	RGBW 6000K
Red (120lm/m)	Red (120lm/m)	Red (120lm/m)	Red (140lm/m)	Red (140lm/m)	Red (140lm/m)	Red (170lm/m)	Red (170lm/m)	Red (170lm/m)
Green (270lm/m)	Green (270lm/m)	Green (270lm/m)	Green (320lm/m)	Green (320lm/m)	Green (320lm/m)	Green (430lm/m)	Green (430lm/m)	Green (430lm/m)
Blue (110lm/m)	Blue (110lm/m)	Blue (110lm/m)	Blue (120lm/m)	Blue (120lm/m)	Blue (120lm/m)	Blue (465lm/m)	Blue (465lm/m)	Blue (465lm/m)
White (410lm/m)	White (420lm/m)	White (430lm/m)	White (470lm/m)	White (480lm/m)	White (510lm/m)	White (660lm/m)	White (670lm/m)	White (690lm/m)
60 LED's per metre			72 LED's per metre			96 LED's per metre		

Code

Example: CHROMAFLEX-19-20-RGB3-5000

Code	Power		IP		CCT		Length
CHROMAFLEX	19	19W/m	20	IP20	RGB3	RGBW (3000K)	- XXXX
	23	23W/m	67	IP67	RGB4	RGBW (4000K)	
	30	30W/m			RGB6	RGBW (6000K)	

HAWKO Lighting reserve the right to change any data without notification