
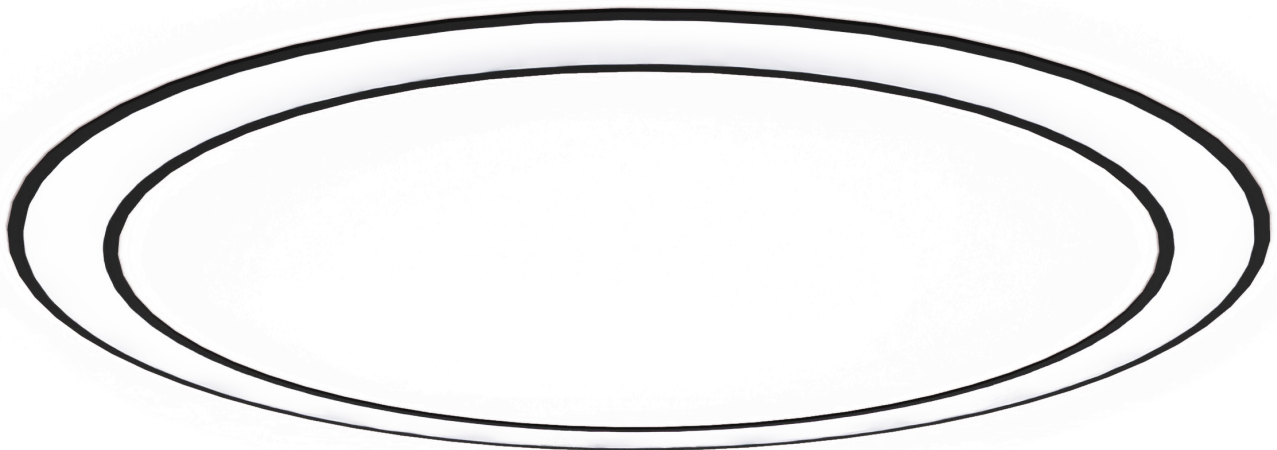


# 50 CURVED RECESSED - H5045RC




## Key Features

- 300mm minimum bend radius
- Even illumination
- Complete with mounting components
- Complies with relevant Australian standards
- Detailed shop drawings
- Typical length is 2.5m (Longer lengths available on request)
- Other RAL colours available on request

## Dimensions

### Profile




## Colour Options



## Mounting

Recessed (R)



## Code

Example: H5045RC - S108030ODD010 - 2400

| Code    | Mounting   | Power               | CRI       | CCT       | Optics  | Driver        | Finish    | Length |
|---------|------------|---------------------|-----------|-----------|---------|---------------|-----------|--------|
| H5045RC | R Recessed | 10 9.6W/m 602lm/m   | 80 CRI>80 | 30 3000K  | OD Opal | DO Non-Dim    | 10 Black  | - XXXX |
|         |            | 28 28.8W/m 1806lm/m | 90 CRI>90 | 35 3500K  |         | DA DALI       | 11 White  |        |
|         |            | 43 43.2W/m 2709lm/m |           | 40 4000K  |         | SW Switch-Dim | CU Custom |        |
|         |            |                     |           | 50 5000K  |         | CA Casambi    |           |        |
|         |            |                     |           | RGB3 RGBW |         | D4 DALI RGBW  |           |        |
|         |            |                     |           | 3000K     |         | C4 Casambi    |           |        |
|         |            |                     |           | RGB4 RGBW |         | RGBW          |           |        |
|         |            |                     |           | 4000K     |         |               |           |        |