


HSV B1606



Key Features


- Minimum bend diameter - 50mm
- Ambient working temperature: MAX (+)95°C
- Bending Direction - Vertical
- Cut Length (Monochrome) - 166.7mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 100mm
- DMX/SPI Pixel Light options available on request

Mounting Accessories

Aluminium Profile




Connectors

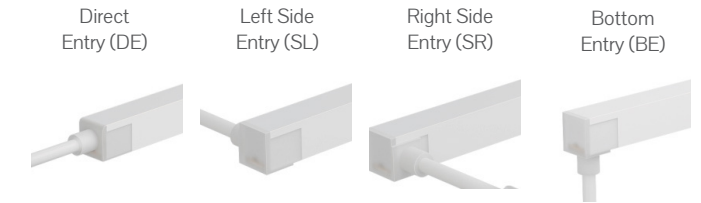

Accessory Dimensions

Aluminium Profile



Code

Example: HSVB1617 - 068022DEDO-2400

Code	Wattage (W/m)	CRI	CCT	lm/m	Connector	Driver	Length
HSV B1617	06 6W/m	80 CRI>80	22 2200K	350	DE Direct Entry	DO Non-Dim	-XXXX
			27 2700K	400	SL Left side entry	DA DALI	
			30 3000K	450	SR Right side entry	CA Casambi	
			35 3500K	450	BE Bottom Entry	SW Switch Dim	
			40 4000K	450		PH Phase Dim	
			57 5700K	450		RC 2.4Ghz Remote Control	
			65 6500K	450			
	TW 2200K - 5700K						
	04 3.6W/m		RGB RGB				
	05 5W/m		R2 RGBW (2700K)				
		R3 RGBW (3000K)					
		R4 RGBW (4000K)					

Lumen/m figures based on, 6W, CRI>80.

FOS Lighting reserve the right to change any data without notification.