


H7698HR

IP20

24V

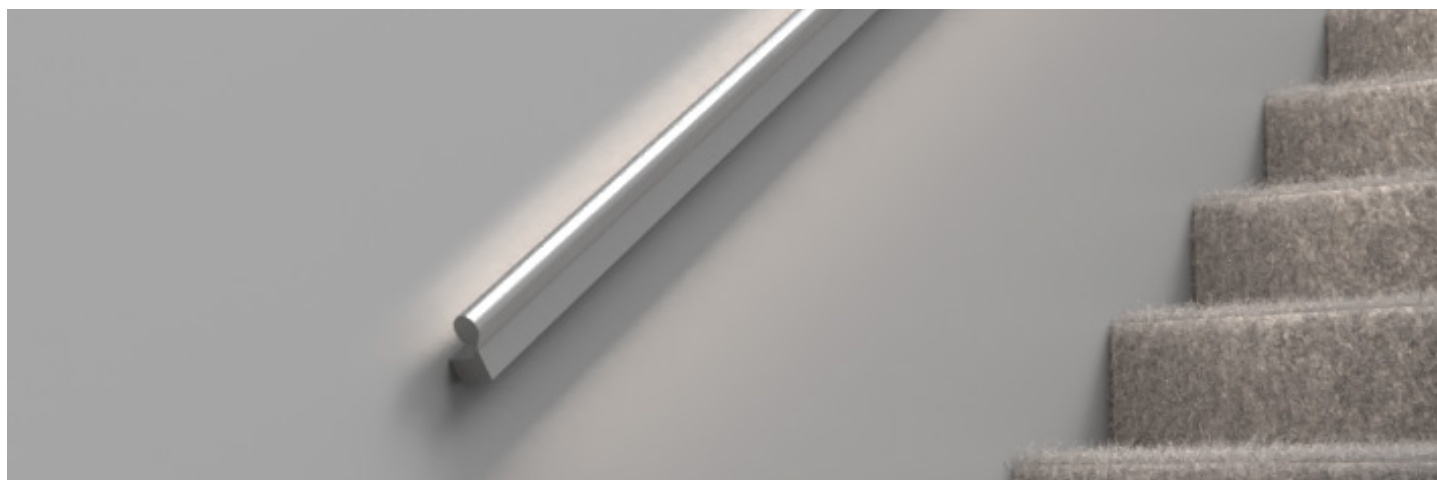


Key Features


- Easy installation
- Max module lengths are 3m
- Butt joins to create longer lengths
- Metal endcap

Dimensions

Profile



Colour Options



Technical Information

ECO FLEX G2											
IP20/IP67											
CRI>80											
Heatsink required for installation											
4.8W/m (5)			9.6W/m (10)			14.4W/m (15)			19.2W/m (20)		
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
500lm/m	520lm/m	575lm/m	1000lm/m	1050lm/m	1150lm/m	1530lm/m	1630lm/m	1730lm/m	2050lm/m	2150lm/m	2300lm/m

Code

Example: HE7698HR -C-05-20-90-40-OD-D0-10-2500

Code		Mounting		Power (Direct - Indirect)		CRI		CCT		Optics		Driver		Finish		Length		
HE7698HR	V76x98mm Hand Rail	W	Wall Direct	05	4.8W/m	90	CRI>90	27	2700K	OD	Opal	D0	Non-Dim	10	Black	-XXXX		
		C	or Indirect Wall Direct/ Indirect	10	9.6W/m			30	3000K			DA	DALI				11	White
				15	14.4W/m			35	3500K			D4	DALI RGBW				79	Natural
				20	19.2W/m			40	4000K			SW	Switch-Dim				CU	Anodised
				50	5000K			CA	Casambi				Custom					
				65	6500K			C4	Casambi (TW/ RGB/RGBW)									
				TW	2500K-6000K													
				RGB	RGB													
				RGBW3K	RGBW 3000K													
				RGBW4K	RGBW 4000K													
RGBW6K	RGBW 6000K																	

FOS Lighting reserve the right to change any data without notification