

# 36 RECESSED - H3535R




## Key Features


- Minimum length 600mm
- Maximum module length 2.9m
- 45°, 90°, T, X, Y bends available
- 0.9kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

## Dimensions

### Profile




## Colour Options

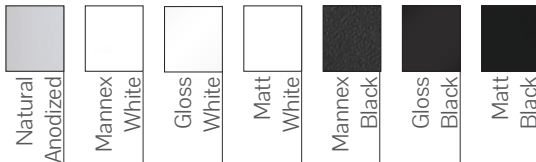

## Mounting

Recessed (R)



## Code

Example: H3535R - R168030ODDO11 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length							
H3535R	R Recessed	16	16 W/m	1824lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	79	Anodised	- XXXX
		19	19 W/m	2166lm/m	90	CRI>90	40	4000K	DA	DALI	11	Mannex			
		26	26 W/m	2912lm/m			50	5000K	PD	Push-Dim		White			
							TW	2700K - 6500K	CA	Casambi	12	Gloss White			
									TW	Tunable White	13	Matt White			
											10	Mannex Black			
											9	Gloss Black			
											8	Matt Black			
											CU	Custom			

# HAWKO Lighting reserve the right to change any data without notification

\*\*Lumens based on 4000K

\*\*\*CRI 80 as standard