

36 SQUARE - H3535




Key Features


- Minimum length 600mm
- Maximum module length 2.9m
- 45°, 90°, T, X, Y bends available
- 0.9kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

Dimensions

Profile




Colour Options

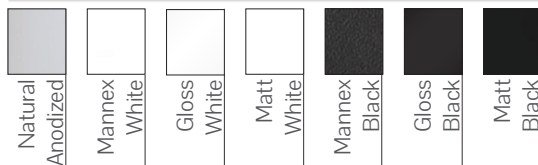

Mounting

Surface Mounted (S) Wire Pendant (P)

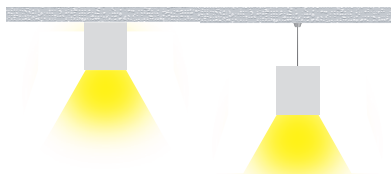

Code

Example: H3535 - S1680300DDO11 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length						
H3535	S Surface Mounted	16	16 W/m	1824lm/m	80 CRI>80	30	3000K	OD	LED+	DO Non-Dim	DA DALI	79	Anodised	- XXXX
		19	19 W/m	2166lm/m								11	Mannex	
	P Wire Pendant	26	26 W/m	2912lm/m	90 CRI>90	40	4000K	PD Push-Dim	CA Casambi	TW Tunable White	12	Gloss White		
		50	5000K	13							Matt White			
	TW	2700K - 6500K	9	Gloss Black	10	Mannex Black	8	Matt Black						
									8	Matt Black				
											CU	Custom		

HAWKO Lighting reserve the right to change any data without notification

**Lumens based on 4000K

***CRI 80 as standard