


50 CURVED - H5075C

IP20

24V


5
YR
WARRANTY

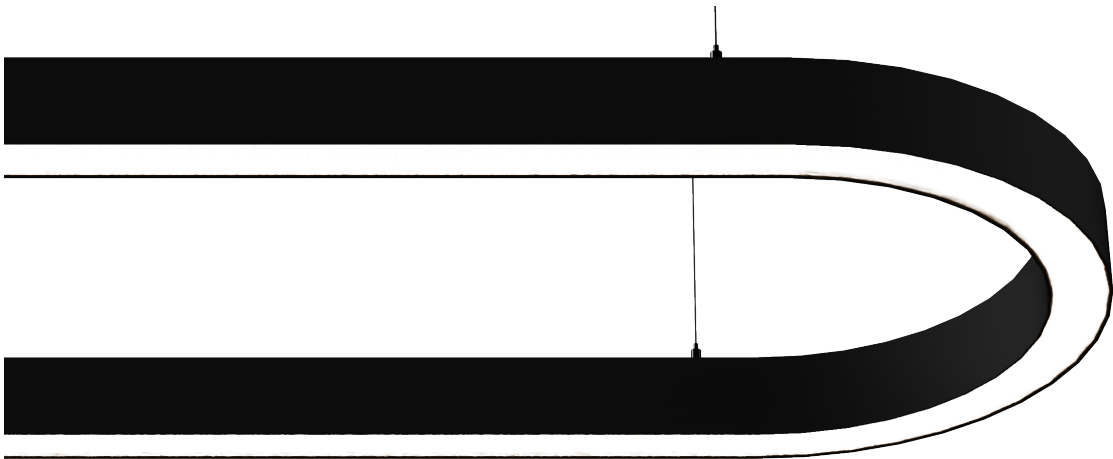

Key Features

- 300mm minimum bend radius
- Even illumination
- Complete with mounting components
- Complies with relevant Australian standards
- Detailed shop drawings
- Typical length is 2.5m (Longer lengths available on request)
- Other RAL colours available on request

Dimensions



Colour Options



Mounting

Surface Mounted (S) Wire Pendant (P) Up/Down Wire (U)
Rod Pendant (D) Up/Down Rod (Y)



Code

Example: H5075C - S1080300DDO10 - 2400

Code	Mounting		Power			CRI		CCT		Optics		Driver		Finish		Length
H5075C	S	Surface Mounted	28	28.8W/m	1806lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
	P	Wire Pendant	43	43.2W/m	2709lm/m	90	CRI>90	35	3500K			DA	DALI	11	White	
	D	Rod Pendant						40	4000K			SW	Switch-Dim	12	Silver	
	U	Up/Down Wire						50	5000K			CA	Casambi	CU	Custom	
		Pendant						RGB3	RGBW			D4	DALI RGBW			
	Y	Up/Down Rod Pendant						RGB4	RGBW 4000K			C4	Casambi RGBW			

HAWKO Lighting reserve the right to change any data without notification