

75 JOIST - H75107




Key Features


- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- 4.3kg/m
- Custom colours available on request
- Direct & Indirect illumination

Dimensions

Profile




Colour Options



Mounting

Wire Pendant (P) Up/Down Wire (U) Wall Up & Down Mounted (C) Wall Mounted (W)
Rod Pendant (D) Up/Down Rod (Y) Wall Mounted Adjustable (A)

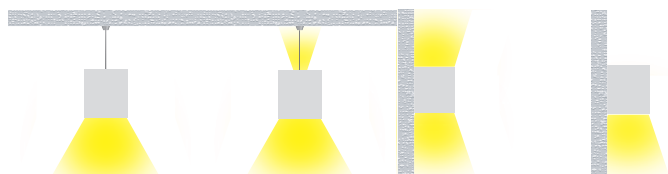

Code

Example: H75107 - P1680300DD011 - 2400

Code	Mounting	Power			CRI		CCT		Optics		Driver		Finish		Length
H75107	P Wire Pendant	16	16W/m	2934lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
	D Rod Pendant	19	19 W/m	3610lm/m	90	CRI>90	40	4000K	MF	Micro	DA	DALI	11	White	
	U Up/Down Wire	26	26 W/m	4742lm/m			50	5000K		Prismatic	PD	Push-Dim	75	Gray	
	Y Up/Down Rod	35	35 W/m	6342lm/m			TW	2700K - 6500K		Frosted	CA	Casambi	CU	Custom	
	W Fixed Wall	40	40W/m								TW	Tunable White			
	A Adjustable wall														
	C Wall Up/Down														

HAWKO Lighting reserve the right to change any data without notification

**Lumens are delivered lumens for both direct & indirect at the same time

**CRI 80 as standard