

# CEILING MOUNTED LOW TRIM DOWNLIGHT (150 SERIES)



IP65


5  
YR  
WARRANTY



## Key Features

- 5 Year Warranty
- CRI>80 (Standard), CRI>90 (Optional)
- 220-240V
- Working Temperature: -20°c to +50°c
- 2mm thick toughened glass diffuser
- Aluminium housing with corrosion resistant powdercoating
- L80 >50000 hours

## Dimensions

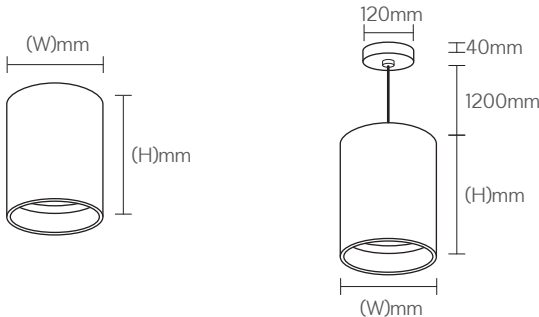

## Technical Information

	Dimensions	Illumination	Lumens
	Width (W) x Height (H)	Wattage	Lumens/m
CML150150	150mm x 150mm	1x15	1623
		1x20	2265
CML150200	150mm x 200mm	1x15	1623
		1x20	2265
		1x30	3398
		1x40	-
CML150300	150mm x 300mm	1x15	1623
		1x20	2265
		1x30	3398
		1x40	-

## Code

Example: CML150150-1x15W-3K-80-B-ND-12

Fitting	Mounting		Illumination		LED Colour		CRI		Finish		Control Gear		Beam Angle	
CML150150 CML150200 CML150300	S P	Surface Mounted Pendant	1x15W 1x20W 1x30W 1x40W	1x15 Watts 1x20 Watts 1x30 Watts 1x40 Watts	3K 4K 6K	3000K 4000K 6000K	80 90	CRI>80 CRI>90	B W G M BR	Black White Grey Stainless Steel Mirror Stainless Steel Brushed	ND DA	Non-Dim DALI	12 24 36 60	12° 24° 36° 60°

# HAWKO Lighting reserve the right to change any data without notification