

18 SLIM - HE1809



IP20

24V


3
YR
WARRANTY




Key Features

- Dot free illumination with 120 LED/m strips
- Easy installation
- Max module lengths are 2.5m
- Butt joins to create longer lengths
- 2 clear mounting clips per metre of extrusion
- 45 & 90 bends available (custom bends available upon request)
- Grey PMMA screwless end caps

Dimensions

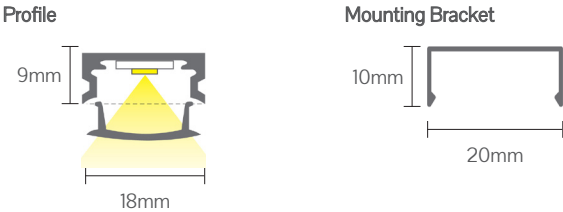

Colour Options



Technical Information

ECO FLEX G2											
IP20											
CRI>80											
Heatsink required for installation											
4.8W/m (5)			9.6W/m (10)			14.4W/m (15)			19.2W/m (20)		
2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
500lm/m	520lm/m	575lm/m	1000lm/m	1050lm/m	1150lm/m	1530lm/m	1630lm/m	1730lm/m	2050lm/m	2150lm/m	2300lm/m

#See individual LED Flex data sheet for full break down

Code

Example: HE1807 - S059027ODDO11 - 2400

Code	Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
HE1809	S	Surface Mounted	5	4.8W/m	80	CRI>80	27	2700K	OD	Opal	DO	Non-Dim	79	Anodised	- XXXX
			10	9.6W/m			30	3000K	IC	Ice	DA	DALI			
			15	14.4W/m			40	4000K	CL	Clear	CA	Casambi			
			20	19.2W/m							PD	Phase Dim			

HAWKO Lighting reserve the right to change any data without notification **See technical table for configurations