

55 RECESSED - H5584R




IP20

240V

5
YR
WARRANTY


TW

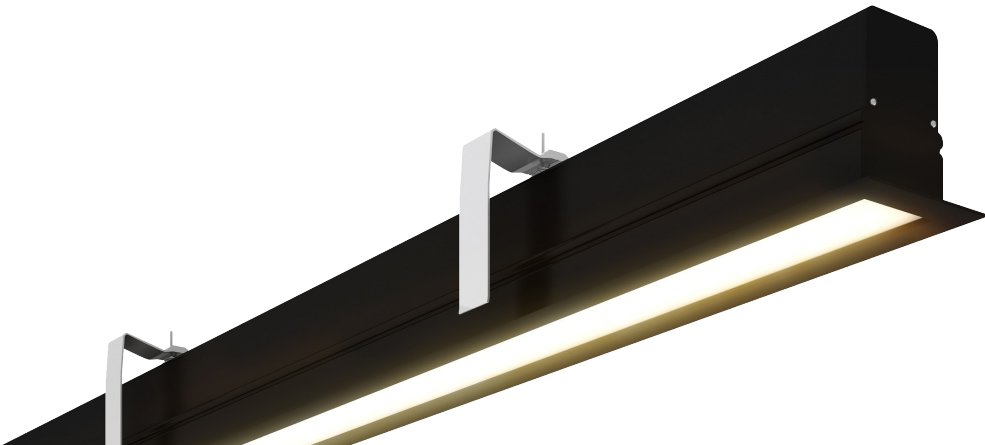

Key Features

- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- 2.9kg/m
- IP55 (On request)
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

Dimensions



Colour Options

Anodic Natural
Matt (Gray)


White

Black

Custom

Mounting

Recessed (R)



Code

Example: H5584R - R168030ODDO11 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H5584R	R Recessed	16 16W/m 1347 lm/m 19 19 W/m 1761 lm/m 26 26 W/m 2278 lm/m 35 35 W/m 3004 lm/m 40 40W/m	80 CRI>80 90 CRI>90	30 3000K 40 4000K 50 5000K TW 2700K - 6500K	OD Opal MF Micro Prismatic Frosted	DO Non-Dim DA DALI PD Push-Dim CA Casambi TW Tunable White	10 Black 11 White 75 Gray CU Custom	- XXXX

HAWKO Lighting reserve the right to change any data without notification **Lumens based on 4000K ***CRI 80 as standard