


ZEUS - WALL MOUNT 100 SERIES


IP65

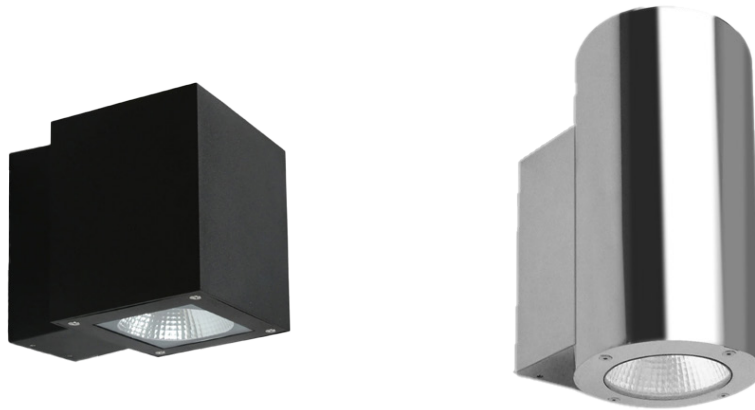

Key Features

- 5 Year Warranty
- CRI>80 (Standard), CRI>95 (Optional)
- DALI-Dim Integrated driver only on profiles larger than 150mm
- Direct, Indirect or Direct/Indirect options
- Fire resistant silicone seal waterproof gasket and 8mm toughened glass

Dimensions

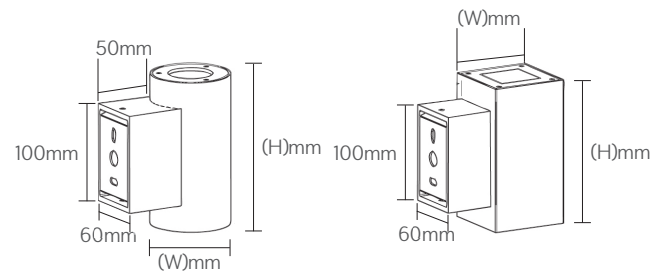

Technical Information

	Dimensions	Illumination	Finish						Lumens			
	Width x Height	Direction x Wattage	B	W	M	BR	G		12°	24°	36°	60°
WM100100	100mm x 100mm	1x5W	-	-	-	-	-		603lm	561lm	504lm	438lm
		2x5W	-	-	-	-	-		1139lm	1065lm	854lm	956lm
WM100150	100mm x 150mm	1x5W	-	-	-	-	-		603lm	561lm	504lm	438lm
		1x10W	-	-	-	-	-		1079lm	1012lm	946lm	825lm
		2x5W	-	-	-	-	-		1139lm	1065lm	854lm	956lm
		2x8W	-	-	-	-	-		2208lm	2004lm	1872lm	1404lm
WM100200	100mm x 200mm	1x5W	-	-	-	-	-		603lm	561lm	504lm	438lm
		1x10W	-	-	-	-	-		1079lm	1012lm	946lm	825lm
		2x5W	-	-	-	-	-		1139lm	1065lm	854lm	956lm
		2x8W	-	-	-	-	-		2208lm	2004lm	1872lm	1404lm

Code

Example: WM100150-1x5W-3K-80-R-B-ND-12

Fitting		Illumination		LED Colour		CRI		Shape		Finish		Control Gear		Beam Angle	
WM100100	100mm x 100mm	1x5W	1x5W Direct or Indirect	3K	3000K	80	CRI>80	R	Round	B	Black	ND	Non-Dim	12	12°
WM100150	100mm x 150mm	1x10W	1x10W Direct or Indirect	4K	4000K	95	CRI>95	S	Square	W	White	DD	DALI-Dim	24	24°
WM100200	100mm x 200mm	2x5W	2x5W Direct/Indirect	5K	5000K					M	SS Mirrored			36	36°
		2x8W	2x8W Direct/Indirect							BR	SS Brushed			60	60°
										G	Grey				