

H12080




Key Features


- Minimum length: 600mm
- Maximum module length: 4m
- Maximum IP rated module length: 2.4m
- 45°, 90°, T, X, Y bends available
- IP66
- 3.5kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

Dimensions

Profile




Colour Options

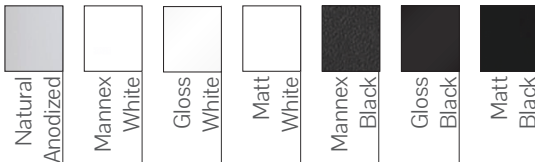

Mounting

Surface Mounted (S) Wire Pendant (P) Recessed Trimless (T) Wall Mounted (W)
Rod Pendant (D) Wall Mounted Adjustable (A)

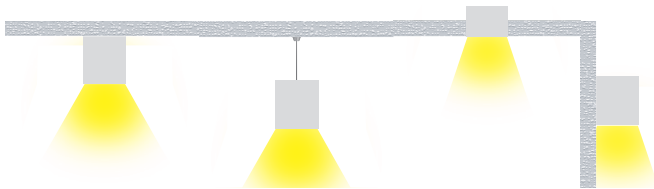

Code

Example: H12080 - S168030ODD011 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H12080	S Surface Mounted	16 16W/m	1306lm/m	80 CRI>80	30 3000K	OD Opal	DO Non-Dim	79 - XXXX
	P Wire Pendant	19 19 W/m	1707lm/m	90 CRI>90	40 4000K	DA Reeded	11 Mannex	
	D Rod Pendant	26 26 W/m	2209lm/m		50 5000K	IC Ice	White	
	T Trimless Recessed	35 35 W/m	2911lm/m		TW 2700K - 6500K	CA Casambi	12 Gloss White	
	W Fixed Wall					TW Tunable White	13 Matt White	
	A Adjustable wall						10 Mannex Black	
							9 Gloss Black	
							8 Matt Black	
							CU Custom	

FOS Lighting reserve the right to change any data without notification

**Lumens based on 4000K

***CRI 80 as standard