

# H60140




IP40

240V



\*Cyanosis compliant on request

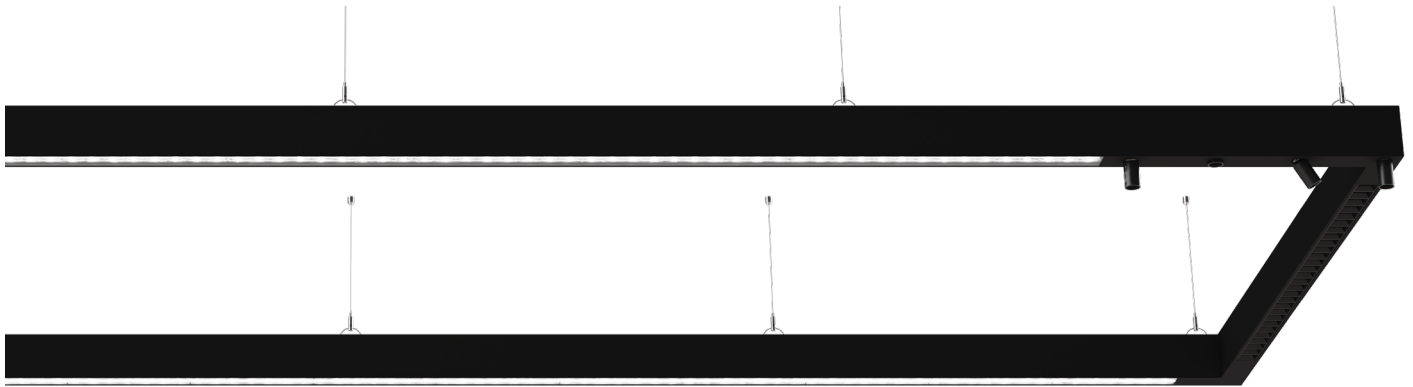


## Key Features


- Complies with relevant Australian Standards
- Screwless end caps (On Request)
- Emergency Options available (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Australian manufactured

## Dimensions

Profile




## Colour Options



## Mounting

Wire Pendant (P)    Up/Down Wire (U)    Wall Up & Down Mounted (C)    Wall Mounted (W)  
Rod Pendant (D)    Up/Down Rod (Y)

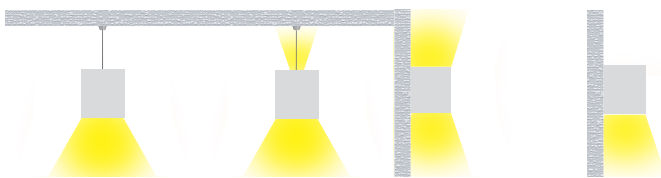

## Code

Example:

H60140- P129030ODD010 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length								
H60140	W	Wal Mounted	12	12 W/m	1008 lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
	C	Wall Up/Down	16	16 W/m	1344 lm/m	90	CRI>90	35	3500K	Lx	Linear Lens##	DA	DALI	11	White	
	P	Pendant (Wire)	20	20 W/m	1680 lm/m			40	4000K	Bx	Black Louvered##	SW	Switch-Dim	75	Grey	
	D	Pendant (Rod)	24	24 W/m	2016 lm/m			50	5000K	Wx	White Louvered##	CA	Casambi	79	Anodised	
	U	Pendant Up/Down (Wire)	28	28 W/m	2352 lm/m			TW	Tunable White	TR	Tack	T2	Tunable White	CU	Custom	
			32	32 W/m	2688 lm/m					MS	Mini Spot					
	Y	Pendant Up/Down (Rod)	36	36 W/m	3024 lm/m											
			40	40 W/m	3360 lm/m											
			44	44 W/m	3696 lm/m											
			48	48 W/m	4032 lm/m											

# HAWKO Lighting reserve the right to change any data without notification    ##Codes identified on the second page of the data sheet

## Optics

### Louvers



B8 - Black Wide 80°  
B5 - Black Medium 50°  
B3 - Black Narrow 35°  
B0 - Black Oval 25 + 70°  
BA - Black Asymmetric  
W8 - White Wide 80°  
W5 - White Medium 50°  
W3 - White Narrow 35°  
W0 - White Oval 25 + 70°  
WA - White Asymmetric

### Linear Lenses



L1 - Glare Control Lens 110°  
L9 - Glare Control Lens 90°  
L6 - Glare Control Lens 60°  
L3 - Glare Control Lens 30°  
LO - Glare Control Lens 30° + 60° Oval  
LA - Glare Control Lens Asymmetric  
LD - Glare Control Lens Double Asymmetric  
LW - Glare Control Lens Wall Grazing

### Opal Diffusers



OD - Opal Diffuser  
CD - Clear High Impact Diffuser (IK06)  
HD - High Impact Opal Diffuser (IK06)

### Track



TR - Track

### Mini Spots



MS - Mini Spot