


# CEILING MOUNTED LOW TRIM DOWNLIGHT (200 SERIES)



## Key Features

- 5 Year Warranty
- CRI>80 (Standard), CRI>90 (Optional)
- 220-240V
- Working Temperature: -20°c to +50°c
- 2mm thick toughened glass diffuser
- Aluminium housing with corrosion resistant powdercoating
- L80 >50000 hours

## Dimensions

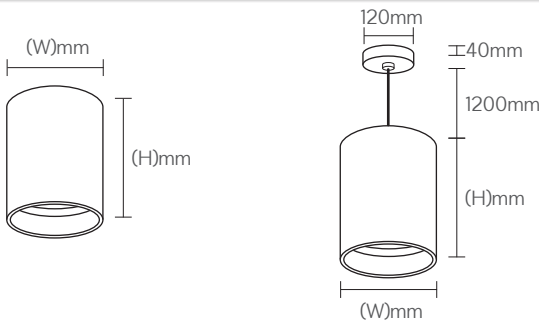

## Technical Information

	Dimensions	Illumination	Lumens
	Width (W) x Height (H)	Wattage	Lumens/m
CML200200	200mm x 200mm	1x20	2127
		1x30	3285
		1x40	4410
		1x60	6663
CML200300	200mm x 300mm	1x20	2127
		1x30	3285
		1x40	4410
		1x60	6663
CML200400	200mm x 400mm	1x20	2127
		1x30	3285
		1x40	4410
		1x60	6663

## Code

Example: CML200200-1x20W-3K-80-B-ND-12

Fitting	Mounting	Illumination		LED Colour		CRI	Finish		Control Gear		Beam Angle	
CML200200 CML200300 CML200400	S P Surface Mounted Pendant	1x20W 1x30W 1x40W 1x60W	1x20 Watts 1x30 Watts 1x40 Watts 1x60 Watts	3K 4K 6K	3000K 4000K 6000K	80 90	CRI>80 CRI>90	B W G M BR Black White Grey Stainless Steel Mirror Stainless Steel Brushed	ND DA	Non-Dim DALI	12 24 36 60	12° 24° 36° 60°

# HAWKO Lighting reserve the right to change any data without notification