
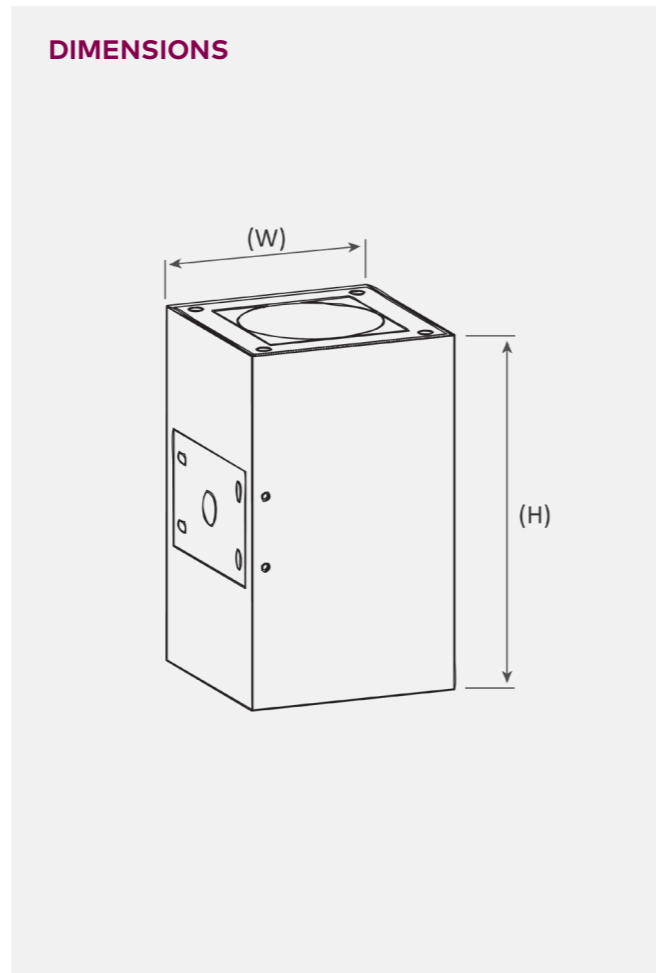


FLUSH WALL MOUNT - 100 SERIES

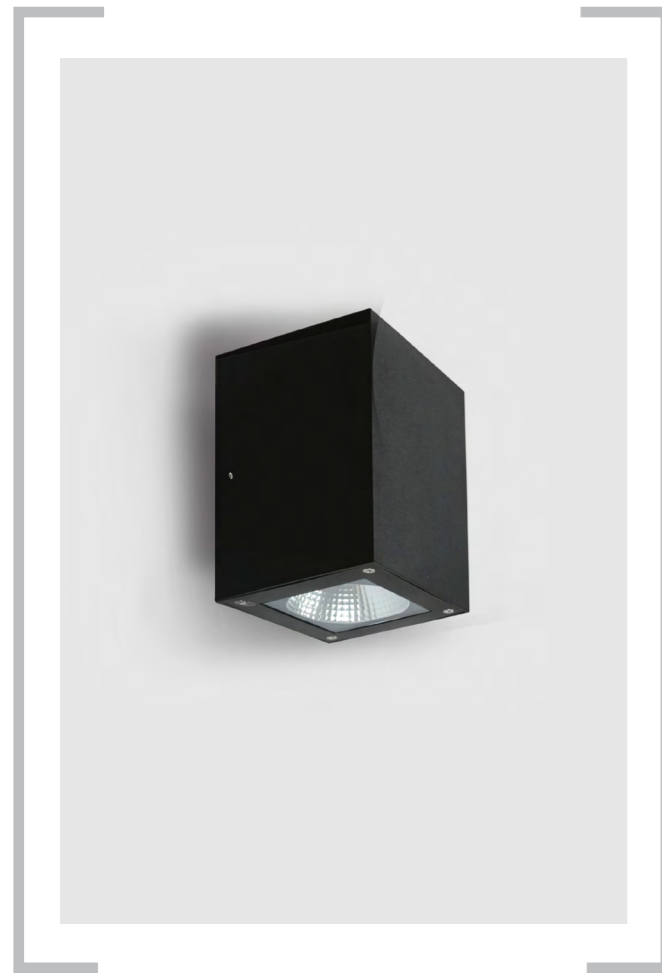

VOLTAGE
100 - 240v A.C. Input

CRI
CRI80 (CRI95 Optional)

IP RATING
IP65 Weatherproof

LED COLOUR TEMPERATURES
3000k (Warm White)
4000k (Natural White)
5000k (Pure White)

OPERATING TEMPERATURE
-30 to +70 degrees Celsius

LED TYPE
CREE COB with 12°, 24°, 36°
& 60° degree beam options

MOUNTING
Wall mounted to surface using flush
wall mount bracket included

WARRANTY
5 years

DRIVER
Non Dim Integral Gear

ILLUMINATION
Single Beam - Direct or Indirect
Multi Beam - Direct & Indirect

FINISH
Die-cast aluminium housing with
powder coated finish

FITTING QUALITY
Fire resistant silicone seal waterproof gasket
and 8mm thick toughened glass flush with trim

LIFETIME
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE	
			B	W	M	BR	G		
100 SERIES	100mm x 150mm	1 x 5w	●	●	●	●	●	FWM100100	
		1 x 10w	●	●	●	●	●		
		2 x 5w	●	●	●	●	●		
	100mm x 200mm	2 x 8w	●	●	●	●	●		
		1 x 5w	●	●	●	●	●		FWM100200
		1 x 10w	●	●	●	●	●		
2 x 5w	●	●	●	●	●				
		2 x 8w	●	●	●	●			

FINISH GUIDE B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey ● Colour Available

SERIES	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
		1 x 5w	603 lm	561 lm	504 lm
100 SERIES	1 x 10w	1079 lm	1012 lm	946 lm	825 lm
	2 x 5w	1139 lm	1065 lm	954 lm	956 lm
	2 x 10w	2208 lm	2004 lm	1872 lm	1404 lm

ORDER CODES

LED Colour	CRI Rating	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95	W White		24 24°
5k 5000k		G Grey		36 36°
				60 60°

FLUSH WALL MOUNT - 100 SERIES

