


WALL MOUNT - 100 SERIES

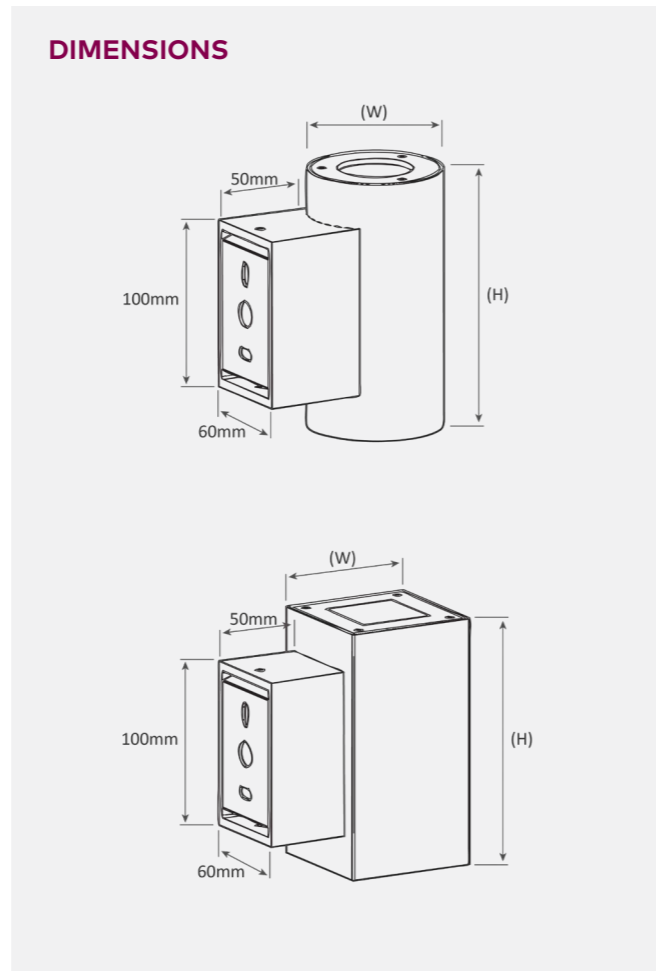

VOLTAGE
100 - 240v A.C. Input

CRI
CRI80 (CRI95 Optional)

IP RATING
IP65 Weatherproof

LED COLOUR TEMPERATURES
3000k (Warm White)
4000k (Natural White)
5000k (Pure White)

OPERATING TEMPERATURE
-30 to +70 degrees Celsius

LED TYPE
CREE COB with 12°, 24°, 36°
& 60° degree beam options

MOUNTING
Wall mounted to surface using
wall mount bracket included

WARRANTY
5 years

DRIVER
Non Dim Integral Gear
DALI Dim Integral Gear (150mm H profile or larger)

ILLUMINATION
Single Beam - Direct or Indirect
Multi Beam - Direct & Indirect

FINISH
316 Stainless Steel with mirrored or
brushed finish or die-cast aluminium housing
with powder coated finish

FITTING QUALITY
Fire resistant silicone seal waterproof gasket
and 8mm thick toughened glass flush with trim

LIFETIME
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE
			B	W	M	BR	G	
100 SERIES	100mm x 100mm	1 x 5w	•	•	•	•	•	WM100100
		2 x 5w	•	•	•	•	•	
	100mm x 150mm	1 x 5w	•	•	•	•	•	WM100150
		1 x 10w	•	•	•	•	•	
		2 x 5w	•	•	•	•	•	
	100mm x 200mm	2 x 8w	•	•	•	•	•	WM100200
		1 x 5w	•	•	•	•	•	
		1 x 10w	•	•	•	•	•	
		2 x 5w	•	•	•	•	•	
		2 x 8w	•	•	•	•		

FINISH GUIDE B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey • Colour Available

SERIES	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
		1 x 5w	603 lm	561 lm	504 lm
100 SERIES	1 x 10w	1079 lm	1012 lm	946 lm	825 lm
	2 x 5w	1139 lm	1065 lm	954 lm	956 lm
	2 x 8w	2208 lm	2004 lm	1872 lm	1404 lm

ORDER CODES

LED Colour	CRI Rating	Shape	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	R Round	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95	S Square	W White	DD DALI Dim	24 24°
5k 5000k			M SS Mirrored		36 36°
			BR SS Brushed		60 60°
			G Grey		

WALL MOUNT - 100 SERIES

