
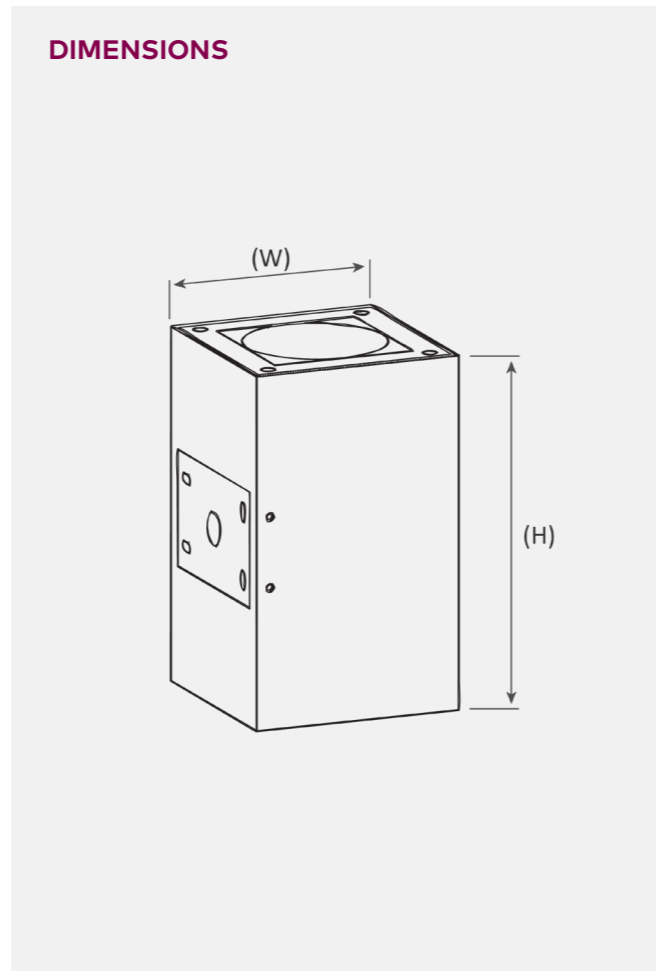


FLUSH WALL MOUNT - 150 SERIES

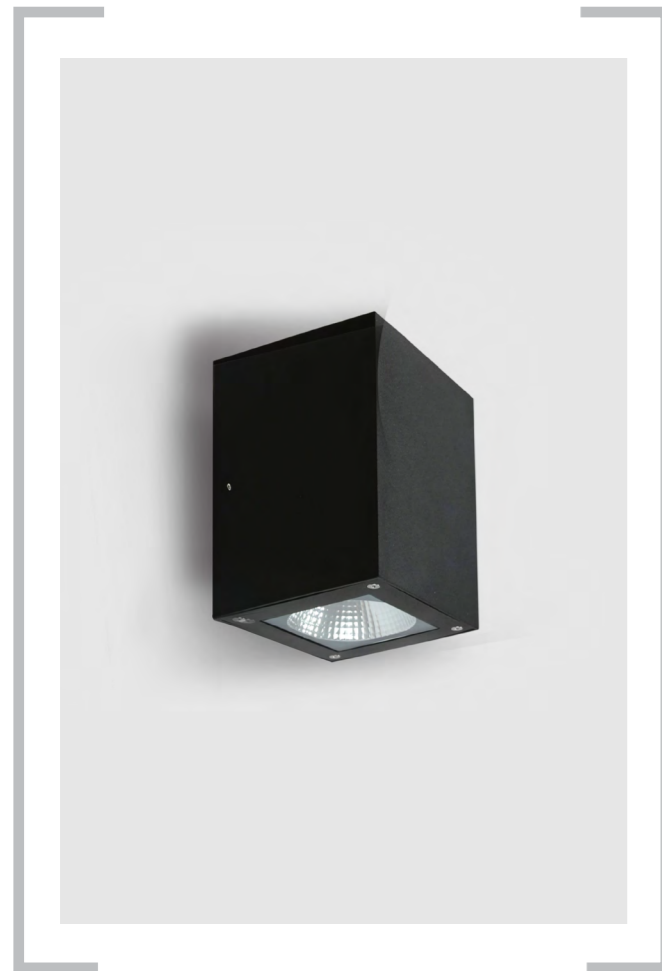

VOLTAGE
100 - 240v A.C. Input

CRI
CRI80 (CRI95 Optional)

IP RATING
IP65 Weatherproof

LED COLOUR TEMPERATURES
3000k (Warm White)
4000k (Natural White)
5000k (Pure White)

OPERATING TEMPERATURE
-30 to +70 degrees Celsius

LED TYPE
CREE COB with 12°, 24°, 36°
& 60° degree beam options

MOUNTING
Wall mounted to surface using flush
wall mount bracket included

WARRANTY
5 years

DRIVER
Non Dim Integral Gear

ILLUMINATION
Single Beam - Direct or Indirect
Multi Beam - Direct & Indirect

FINISH
Die-cast aluminium housing with
powder coated finish

FITTING QUALITY
Fire resistant silicone seal waterproof gasket
and 8mm thick toughened glass flush with trim

LIFETIME
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE
			B	W	M	BR	G	
150mm x 200mm	150mm x 200mm	1 x 15w	●	●	●	●	●	FWM150200
		1 x 20w	●	●	●	●	●	
		1 x 30w	●	●	●	●	●	
		2 x 15w	●	●	●	●	●	
		2 x 20w	●	●	●	●	●	
		2 x 30w	●	●	●	●	●	
150mm x 300mm	150mm x 300mm	1 x 15w	●	●	●	●	●	FWM150300
		1 x 20w	●	●	●	●	●	
		1 x 30w	●	●	●	●	●	
		2 x 15w	●	●	●	●	●	
		2 x 20w	●	●	●	●	●	
		2 x 30w	●	●	●	●	●	

FINISH GUIDE B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey ● Colour Available

150 SERIES	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
	1 x 15w	1415 lm	1320 lm	1299 lm	1279 lm
1 x 20w	1890 lm	1758 lm	1732 lm	1705 lm	
1 x 30w	2854 lm	2638 lm	2598 lm	2558 lm	
1 x 15w	2835 lm	2632 lm	2592 lm	2552 lm	
2 x 20w	3780 lm	3509 lm	3456 lm	3402 lm	
2 x 30w	5670 lm	5264 lm	5184 lm	5104 lm	

ORDER CODES

LED Colour	CRI Rating	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95	W White		24 24°
5k 5000k		G Grey		36 36°
				60 60°

FLUSH WALL MOUNT - 150 SERIES

