


WALL MOUNT - 200 SERIES

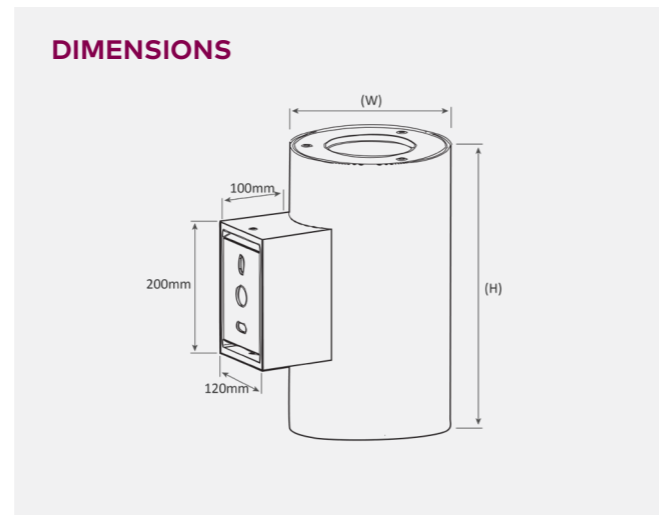

VOLTAGE
100 - 240v A.C. Input

CRI
CRI80 (CRI95 Optional)

IP RATING
IP65 Weatherproof

LED COLOUR TEMPERATURES
3000k (Warm White)
4000k (Natural White)
5000k (Pure White)

OPERATING TEMPERATURE
-30 to +70 degrees Celsius

LED TYPE
CREE COB with 12°, 24°, 36°
& 60° degree beam options

MOUNTING
Wall mounted to surface using
wall mount bracket included

WARRANTY
5 years

DRIVER
Non Dim Integral Gear
DALI Dim Integral Gear

ILLUMINATION
Single Beam - Direct or Indirect
Multi Beam - Direct & Indirect

FINISH
316 Stainless Steel with mirrored or
brushed finish or die-cast aluminium housing
with powder coated finish

FITTING QUALITY
Fire resistant silicone seal waterproof gasket
and 8mm thick toughened glass flush with trim

LIFETIME
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE
			B	W	M	BR	G	
200 SERIES	200mm x 200mm	1 x 20w	●	●	●	●	●	WM200200
		1 x 30w	●	●	●	●	●	
		1 x 40w	●	●	●	●	●	
		1 x 60w	●	●	●	●	●	
		2 x 20w	●	●	●	●	●	
		2 x 30w	●	●	●	●	●	
	200mm x 300mm	2 x 40w	●	●	●	●	●	WM200300
		2 x 60w	●	●	●	●	●	
		1 x 20w	●	●	●	●	●	
		1 x 30w	●	●	●	●	●	
		1 x 40w	●	●	●	●	●	
		1 x 60w	●	●	●	●	●	
	200mm x 400mm	2 x 20w	●	●	●	●	●	WM200400
		2 x 30w	●	●	●	●	●	
		2 x 40w	●	●	●	●	●	
		2 x 60w	●	●	●	●	●	
		2 x 20w	●	●	●	●	●	
		2 x 30w	●	●	●	●	●	
	200mm x 600mm	2 x 40w	●	●	●	●	●	WM200600
		2 x 60w	●	●	●	●	●	
		2 x 20w	●	●	●	●	●	
		2 x 30w	●	●	●	●	●	
		2 x 40w	●	●	●	●	●	
		2 x 60w	●	●	●	●	●	

FINISH GUIDE B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey ● Colour Available

SERIES	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
		200 SERIES	1 x 20w	2448 lm	2349 lm
	1 x 30w	3756 lm	3566 lm	3374 lm	3185 lm
	1 x 40w	4876 lm	4633 lm	4478 lm	4270 lm
	1 x 60w	7346 lm	7033 lm	6562 lm	6269 lm
	2 x 20w	4886 lm	4672 lm	4459 lm	4247 lm
	2 x 30w	7329 lm	7008 lm	6688 lm	6370 lm
	2 x 40w	9784 lm	9342 lm	8922 lm	8495 lm
	2 x 60w	14658 lm	14032 lm	13321 lm	12758 lm

ORDER CODES

LED Colour	CRI Rating	Shape	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	R Round	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95		W White	DD DALI Dim	24 24°
5k 5000k			G Grey		36 36°
					60 60°

WALL MOUNT - 200 SERIES

