
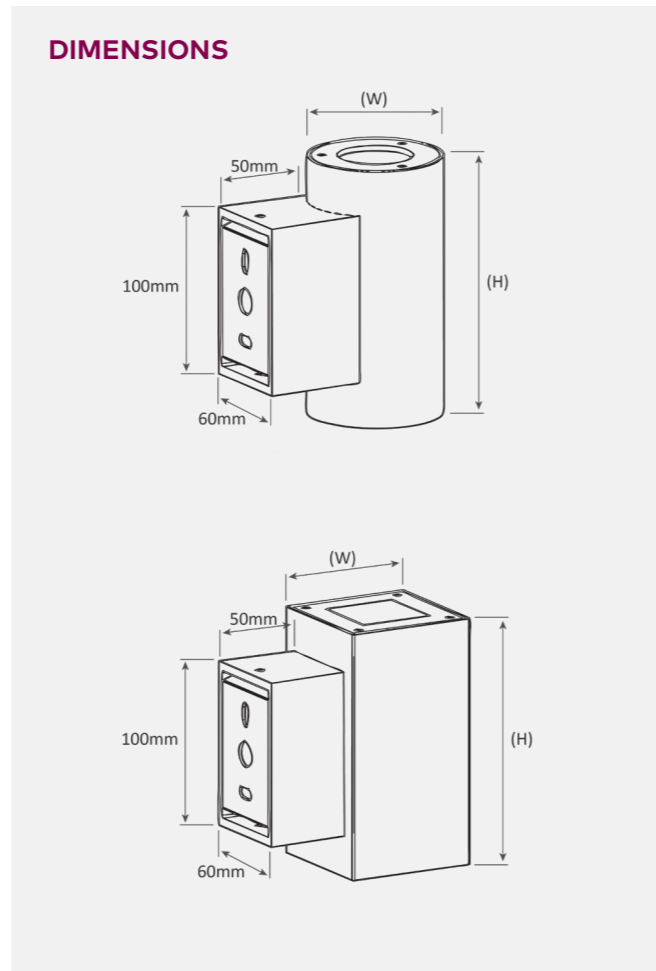


# WALL MOUNT - 80 SERIES

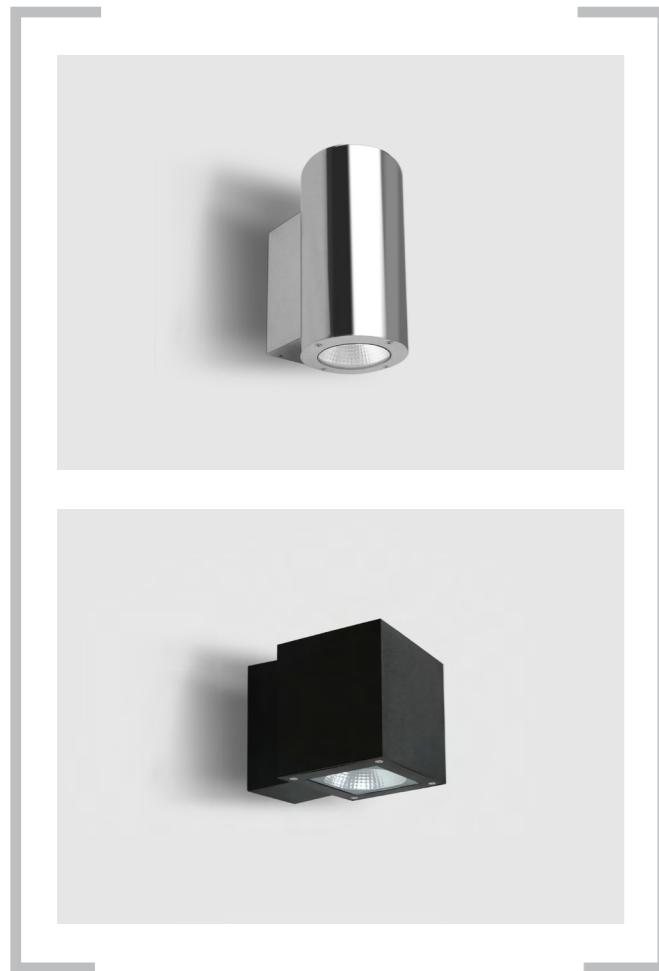

**VOLTAGE**  
100 - 240v A.C. Input

**CRI**  
CRI80 (CRI95 Optional)

**IP RATING**  
IP65 Weatherproof

**LED COLOUR TEMPERATURES**  
3000k (Warm White)  
4000k (Natural White)  
5000k (Pure White)

**OPERATING TEMPERATURE**  
-30 to +70 degrees Celsius

**LED TYPE**  
CREE COB with 12°, 24°, 36°  
& 60° degree beam options

**MOUNTING**  
Wall mounted to surface using  
wall mount bracket included

**WARRANTY**  
5 years

**DRIVER**  
Non Dim Integral Gear  
DALI Dim Integral Gear (150mm H profile or larger)

**ILLUMINATION**  
Single Beam - Direct or Indirect  
Multi Beam - Direct & Indirect

**FINISH**  
316 Stainless Steel with mirrored or  
brushed finish or die-cast aluminium housing  
with powder coated finish

**FITTING QUALITY**  
Fire resistant silicone seal waterproof gasket  
and 8mm thick toughened glass flush with trim

**LIFETIME**  
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE
			B	W	M	BR	G	
80 SERIES	80mm x 100mm	1 x 5w	●	●	●	●	●	WM80100
		2 x 5w	●	●	●	●	●	
	80mm x 150mm	1 x 5w	●	●	●	●	●	WM80150
		1 x 10w	●	●	●	●	●	
		2 x 5w	●	●	●	●	●	
	80mm x 200mm	2 x 8w	●	●	●	●	●	WM80200
		1 x 5w	●	●	●	●	●	
		1 x 10w	●	●	●	●	●	
		2 x 5w	●	●	●	●	●	
			2 x 8w	●	●	●	●	

**FINISH GUIDE** B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey ● Colour Available

SERIES	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
		1 x 5w	623 lm	581 lm	514 lm
80 SERIES	1 x 10w	1121 lm	1022 lm	966 lm	832 lm
	2 x 5w	1219 lm	1162 lm	1059 lm	986 lm
	2 x 8w	2209 lm	2004 lm	1872 lm	1404 lm

## ORDER CODES

LED Colour	CRI Rating	Shape	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	R Round	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95	S Square	W White	DD DALI Dim	24 24°
5k 5000k			M SS Mirrored		36 36°
			BR SS Brushed		60 60°
			G Grey		

## WALL MOUNT - 80 SERIES

