
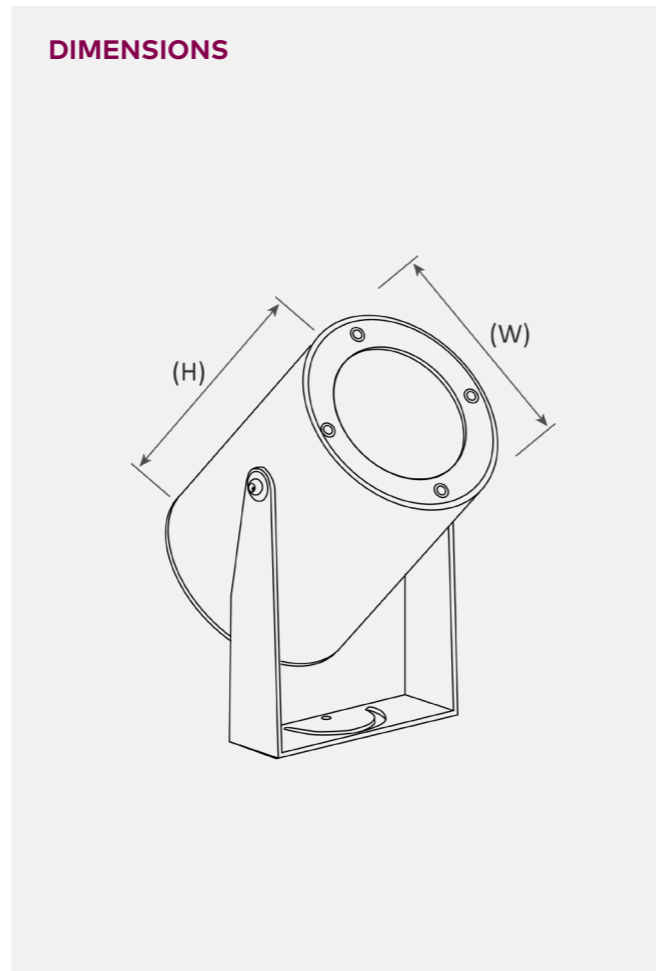


FLOOD LIGHT

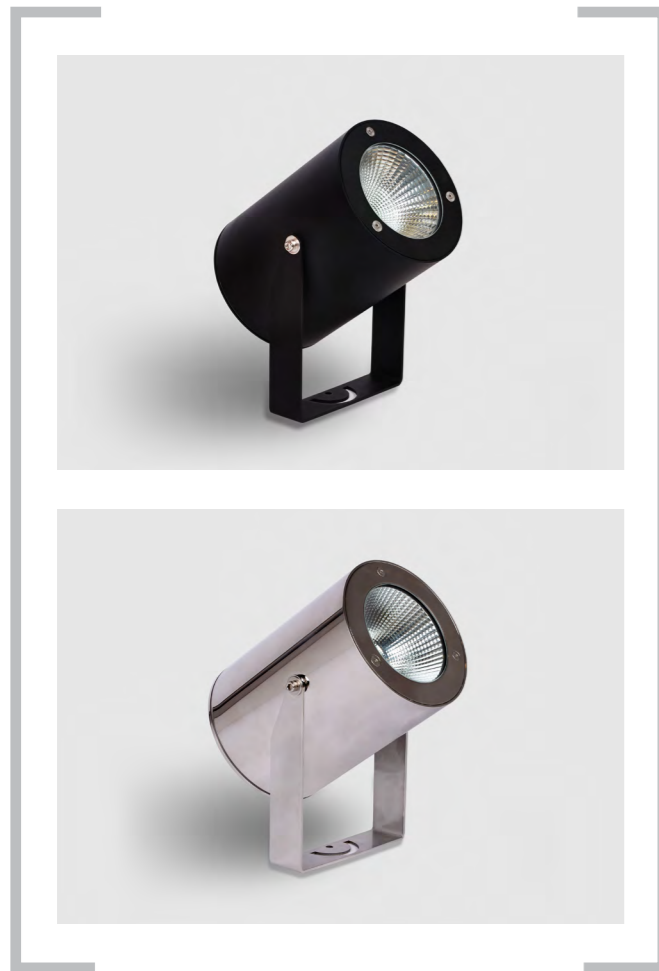

DIMENSIONS

VOLTAGE
100 - 240v A.C. Input

CRI
CRI80 (CRI95 Optional)

IP RATING
IP65 Weatherproof

LED COLOUR TEMPERATURES
3000k (Warm White)
4000k (Natural White)
5000k (Pure White)

OPERATING TEMPERATURE
-30 to +70 degrees Celsius

LED TYPE
CREE COB with 12°, 24°, 36°
& 60° degree beam options

MOUNTING
Surface mounted using surface mount
bracket included

WARRANTY
5 years

DRIVER
Non Dim Integral Gear
DALI Dim Integral Gear

ILLUMINATION
Single Beam - Direct

FINISH
316 Stainless Steel with mirrored or
brushed finish or die-cast aluminium housing
with powder coated finish

FITTING QUALITY
Fire resistant silicone seal waterproof gasket
and 8mm thick toughened glass flush with trim

LIFETIME
L80 B10 >100,000 hours

SERIES	DIMENSIONS	ILLUMINATION	FINISH					UNIQUE CODE
			B	W	M	BR	G	
100 SERIES	100mm x 150mm	1 x 10w	●	●	●	●	●	FL100150
		1 x 15w	●	●	●	●	●	
150 SERIES	150mm x 200mm	1 x 15w	●	●	●	●	●	FL150200
		1 x 20w	●	●	●	●	●	
		1 x 30w	●	●	●	●	●	

FINISH GUIDE B Black W White M Stainless Steel Mirror BR Stainless Steel Brushed G Grey ● Colour Available

	ILLUMINATION	12° BEAM	24° BEAM	36° BEAM	60° BEAM
100 SERIES	1 x 15w	543 lm	493 lm	468 lm	455 lm
	1 x 10w	1341 lm	1232 lm	1170 lm	1136 lm
150 SERIES	1 x 15w	1319 lm	1319 lm	1299 lm	1279 lm
	1 x 20w	1319 lm	1758 lm	1732 lm	1705 lm
	1 x 30w	1319 lm	2638 lm	2598 lm	2558 lm

ORDER CODES

LED Colour	CRI Rating	Finish	Control Gear	Beam Angle
3k 3000k	80 CRI80	B Black	ND Non Dim	12 12°
4k 4000k	95 CRI95	W White	DD DALI Dim	24 24°
5k 5000k		M SS Mirrored		36 36°
		BR SS Brushed		60 60°
		G Grey		

FLOOD LIGHT

